


Display of DSTC message

This function is possible to deactivate display of this message: "DSTC ON".


Now we take S40(04-) 2008 30786352 AD (ECU Diagnostic Part Number) as an example to illustrate the operation:

Note: The highlight item in the figure indicates corresponding action.


1. step 1: S40(04-)

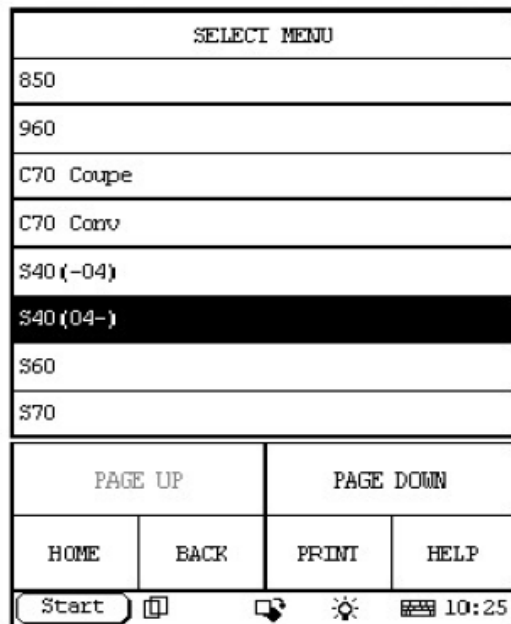

2. step 2: select year

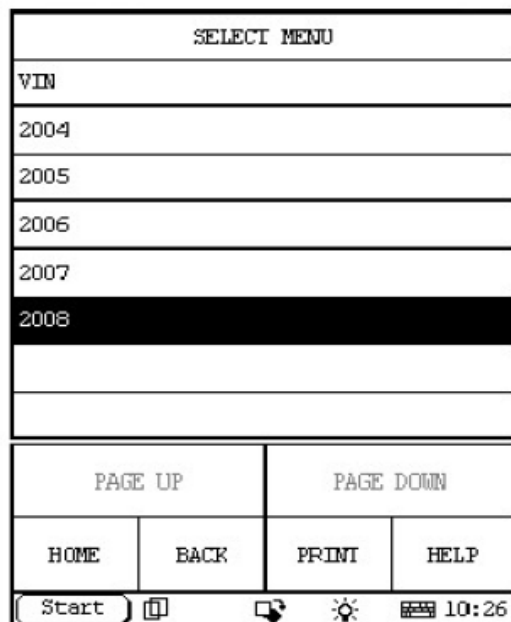




3. step 3: select DIM

SELECT MENU			
DIM(Driver information module)			
PDM(Passenger door module)			
PSM(Power seat module)			
DDM(Driver door module)			
CCM(Climate control module)			
PHM(Phone module)			
SWM(Steering wheel module)			
AUD(Audio Module)			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:27

4. step 4:


Select: Special Function.

If you can't find the Special Function menu, it means the function has not been developed on your vehicle. Please record the VIN (Vehicle Identification Number) and Version Information (can be read by X431 with the function: Reading off control module ID) and email to Launch (x431@cnlaunch.com). We may work out a solution on how to solve the problem.

Select function			
Reading off control module ID			
Reading off Diagnostic Trouble Codes			
Erasing Diagnostic Trouble Codes			
Parameter display			
Activating components/functions			
Service Reset			
Special Function			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:28

5. step 5:

Select: Display of DSTC message

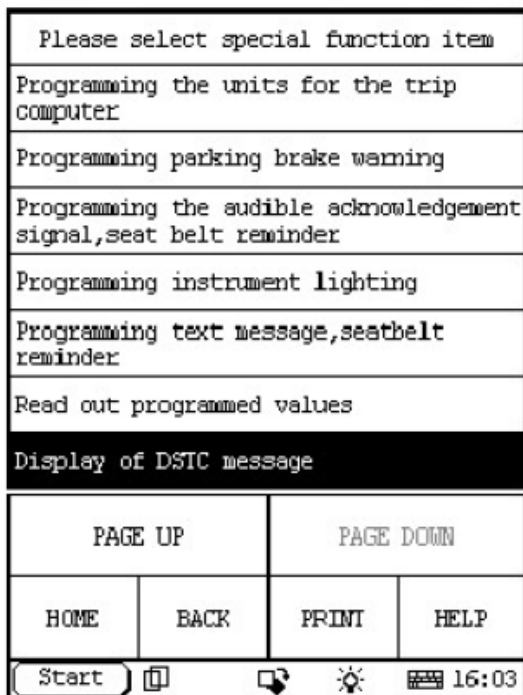


6. step 6:

The information of Display of DSTC message:

Each time the vehicle is started, the text "DSTC ON" appears in the driver information module, it is possible to deactivate display of this message.


Note! This does not affect DSTC functionality, only display of the message.

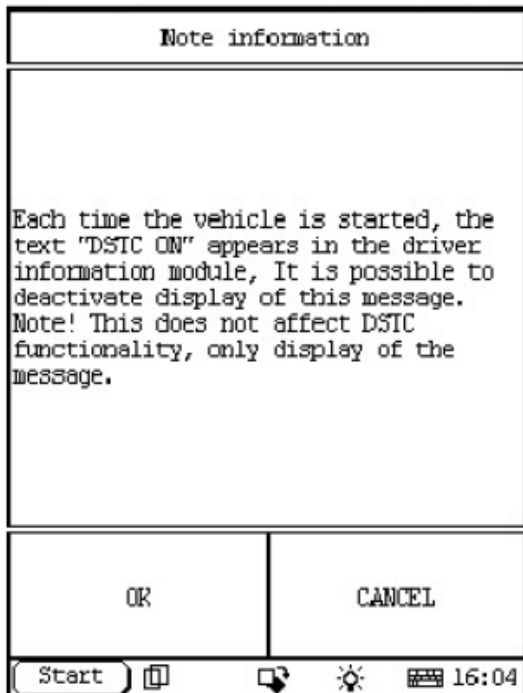


7. step 7:

Select Ok then it will send command to ECU, and display information like this:

Note! If not support information displayed, it will exit this function.

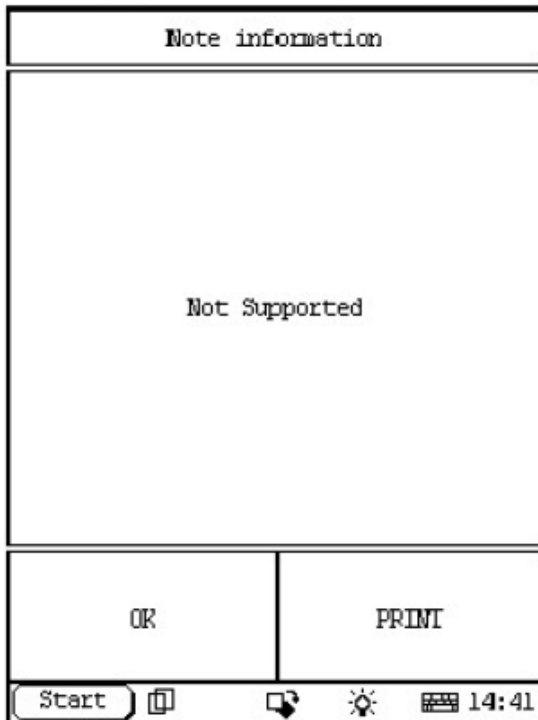

If support, display information like this:

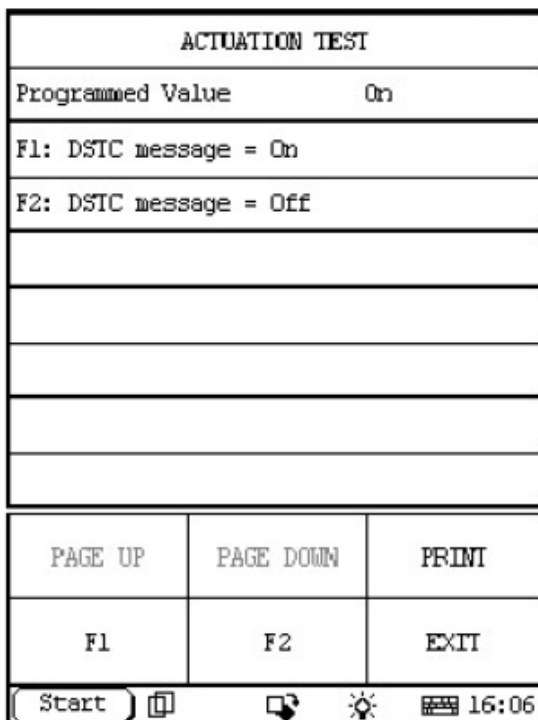





The first line, Programmed Value On, is the present programmed value for your vehicle, if you want to change this value, you can select the desired value in the list:





F1: DSTC message = On

F2: DSTC message = Off

For example: if you want to change this value to Off, please select F2 and it will start programming. When programming finish, the Programmed Value will change to Off as the following figure, it means that the programming succeed.

ACTUATION TEST		
Programmed Value		Off
F1: DSTIC message = On		
F2: DSTIC message = Off		
PAGE UP	PAGE DOWN	PRINT
F1	F2	EXIT
Start     16:09		

8. step 8:
 When you want to exit this programming, please select EXIT:

ACTUATION TEST		
Programmed Value		Off
F1: DSTIC message = On		
F2: DSTIC message = Off		
PAGE UP	PAGE DOWN	PRINT
F1	F2	EXIT
Start     16:11		