FIAT TALENTO/TANGO NOx Temperature Sensor (Downstream SCR Catalyst) Replacement Method
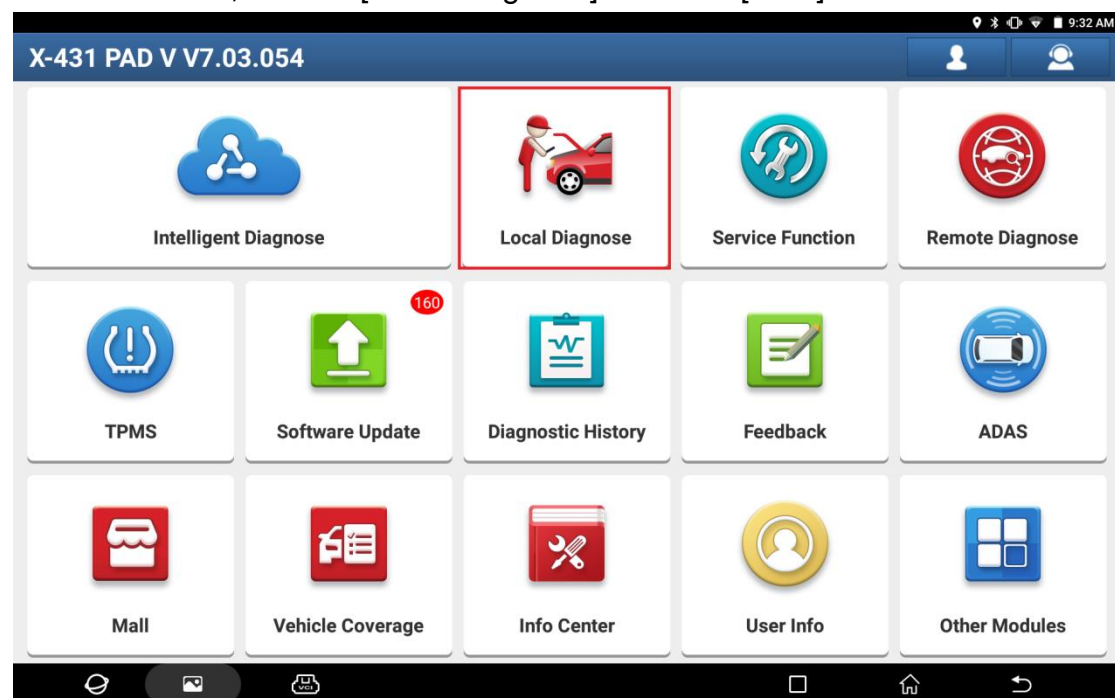
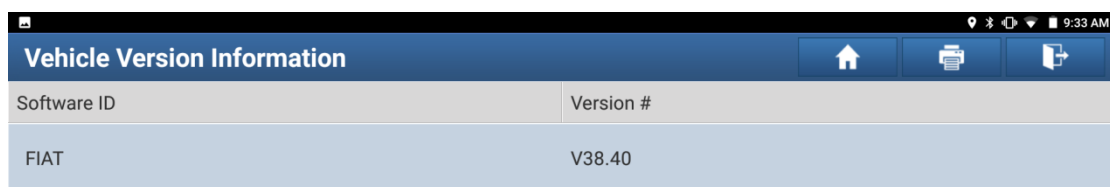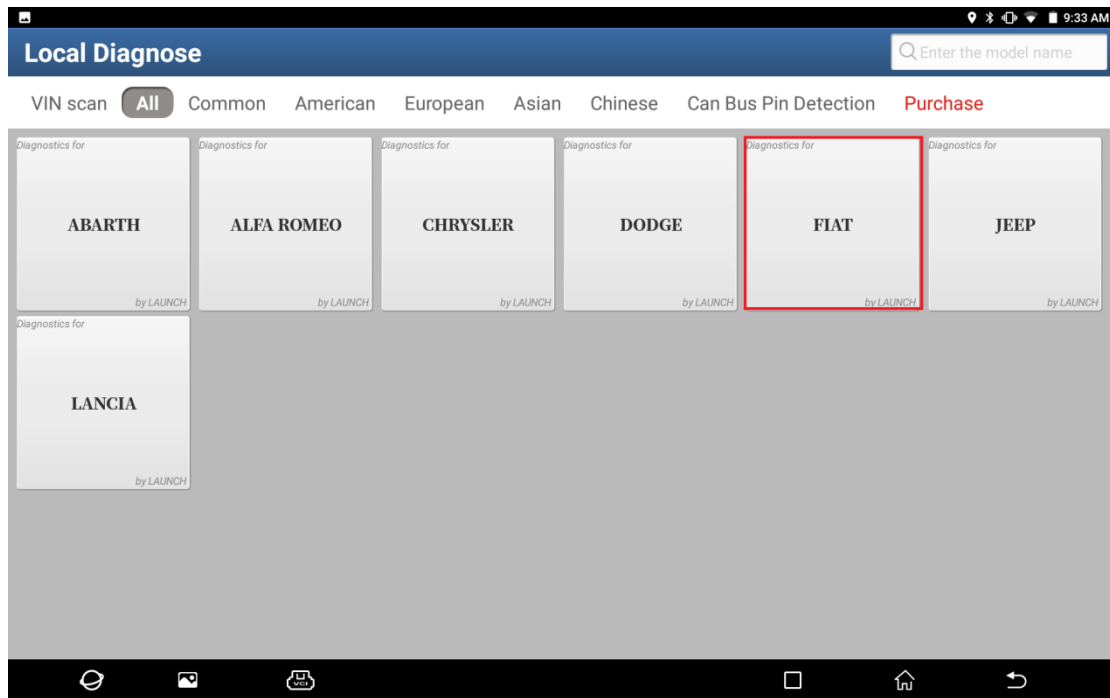**Supported equipment:** Launch's full range of comprehensive diagnostic equipment

Current equipment: PAD V

Function description: When replacing the NOx temperature sensor (downstream SCR catalyst) for FIAT, you need to perform this program.

Tested model: 2016/Fiat/ TALENTO(TANGO), VIN: ZFAFJL007J50*****

1. On a PAD V, choose [Local Diagnose] and then [FIAT] to test.

Local Diagnose

VIN scan | All | Common | American | European | Asian | Chinese | Can Bus Pin Detection | Purchase

Enter the model name

Diagnostics for	Diagnostics for	Diagnostics for	Diagnostics for	Diagnostics for	Diagnostics for
ABARTH	ALFA ROMEO	CHRYSLER	DODGE	FIAT	JEEP
by LAUNCH	by LAUNCH	by LAUNCH	by LAUNCH	by LAUNCH	by LAUNCH

Diagnostics for
LANCIA
by LAUNCH

Vehicle Version Information

Software ID	Version #
FIAT	V38.40

FIAT V38.40

Introduction

ECU Coverage:

This Software Diagnoses All FIAT Series ECUs, Including Engine, AT, ABS, SRS, A/C, Instrument, Power Steering, Body PC, Door Control, Tire Pressure Control, Parking Control And Headlamp, Etc.

(The Following Models Covered Are Only For Reference And Will Vary Constantly With The Upgrades Of Software.)
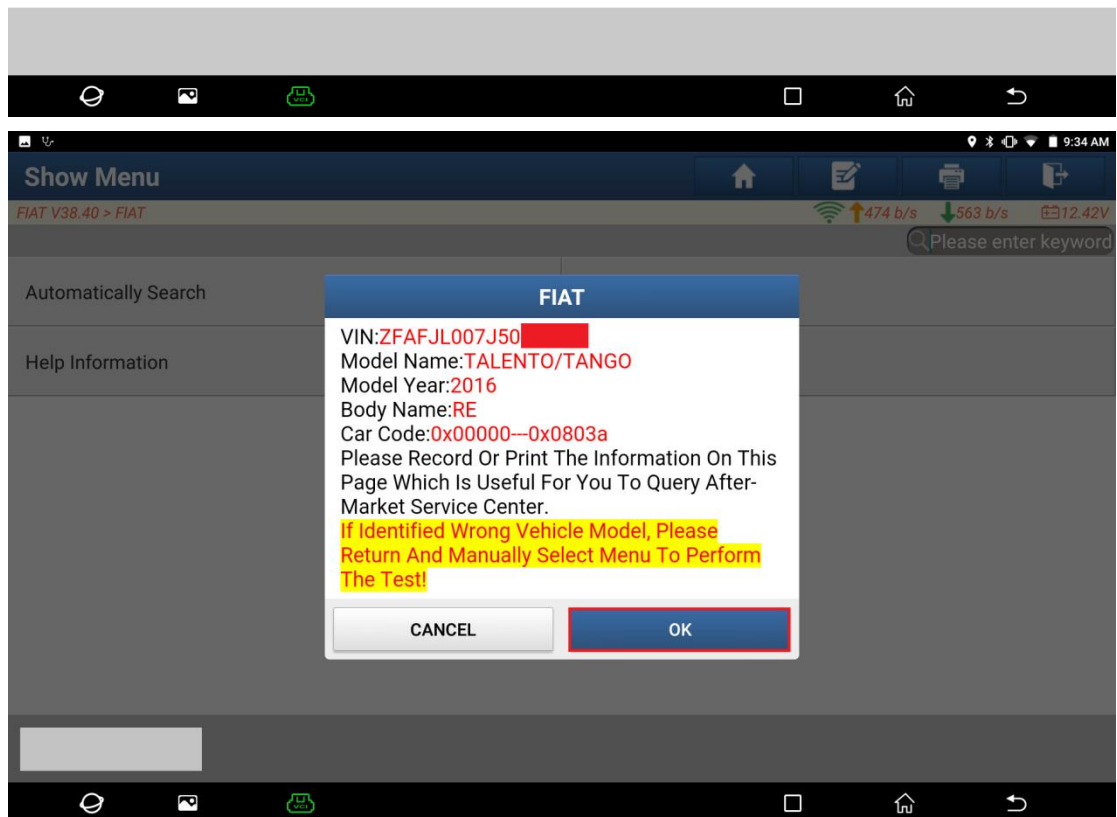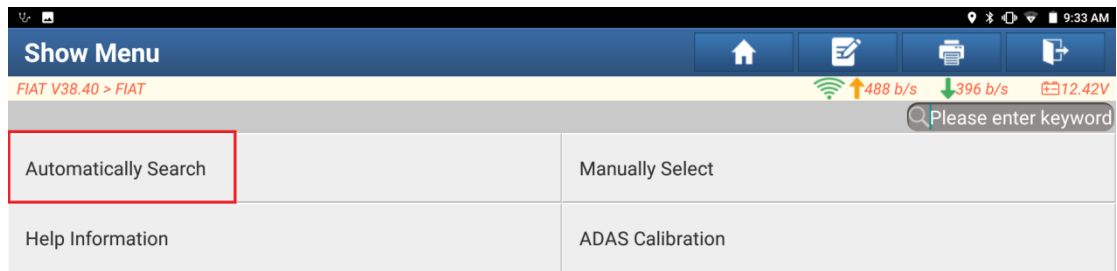
Basic Functions Include:

- Reading ECU Information
- Reading DTCs
- Clearing DTCs
- Reading Vehicle Running Data
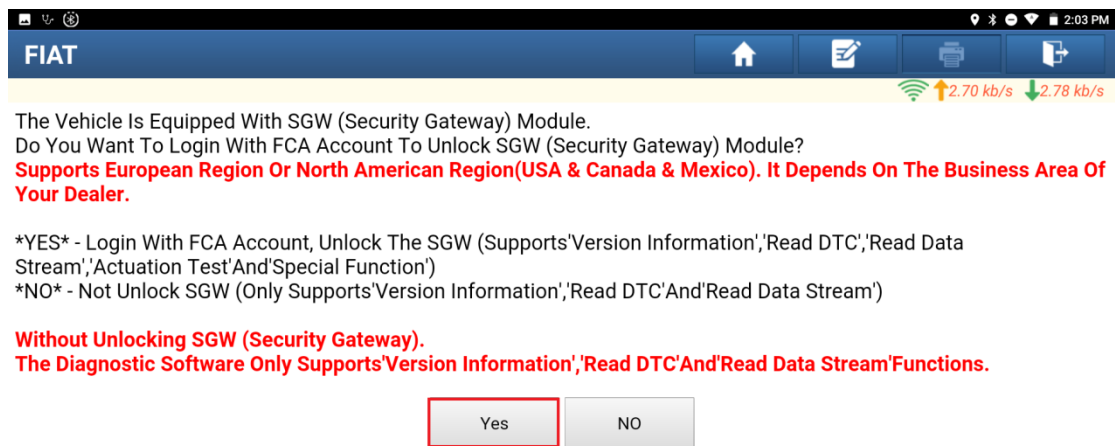- Vehicle component Operation Test

Special functions include:

- Key Programming([Body Module])
- Tire Pressure detection([Body Module]/[Tire Pressure Control])
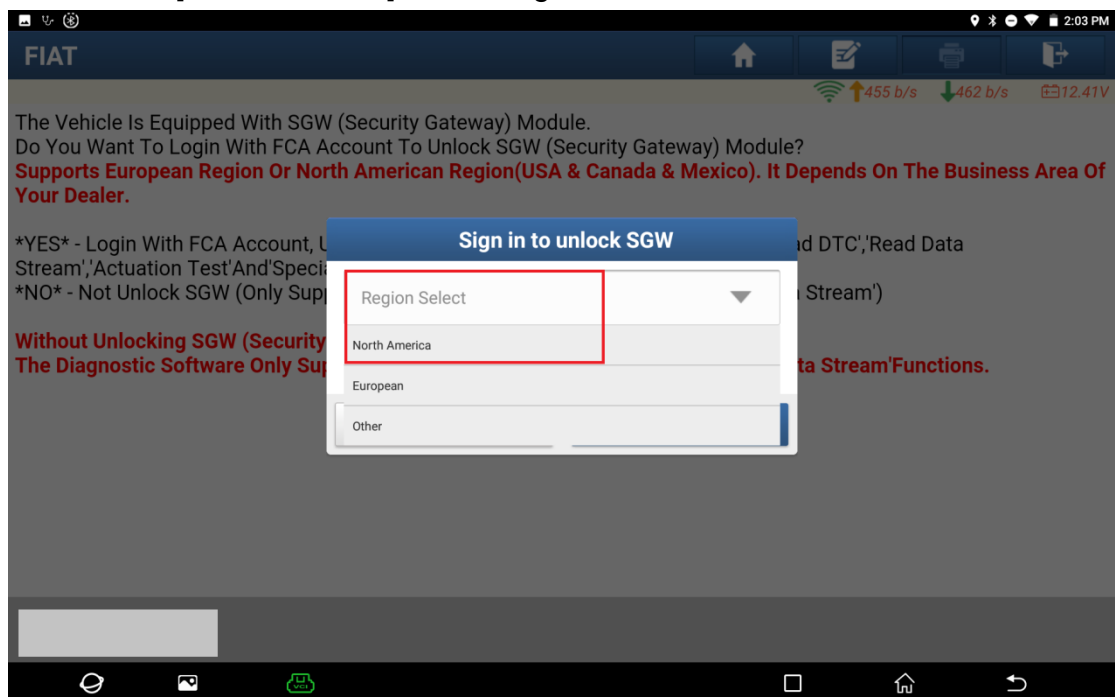- Reset Adaption

Vehicle Coverage | OK

2. Choose [Automatically Search] to identify car models automatically. After the car model is successfully identified, choose OK.
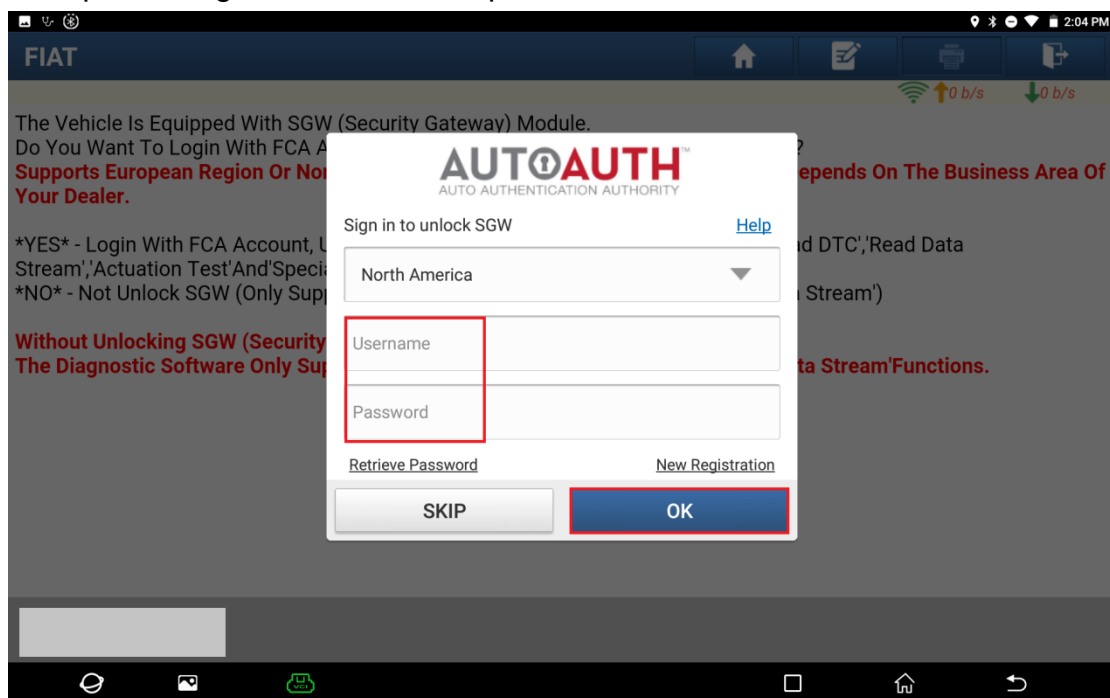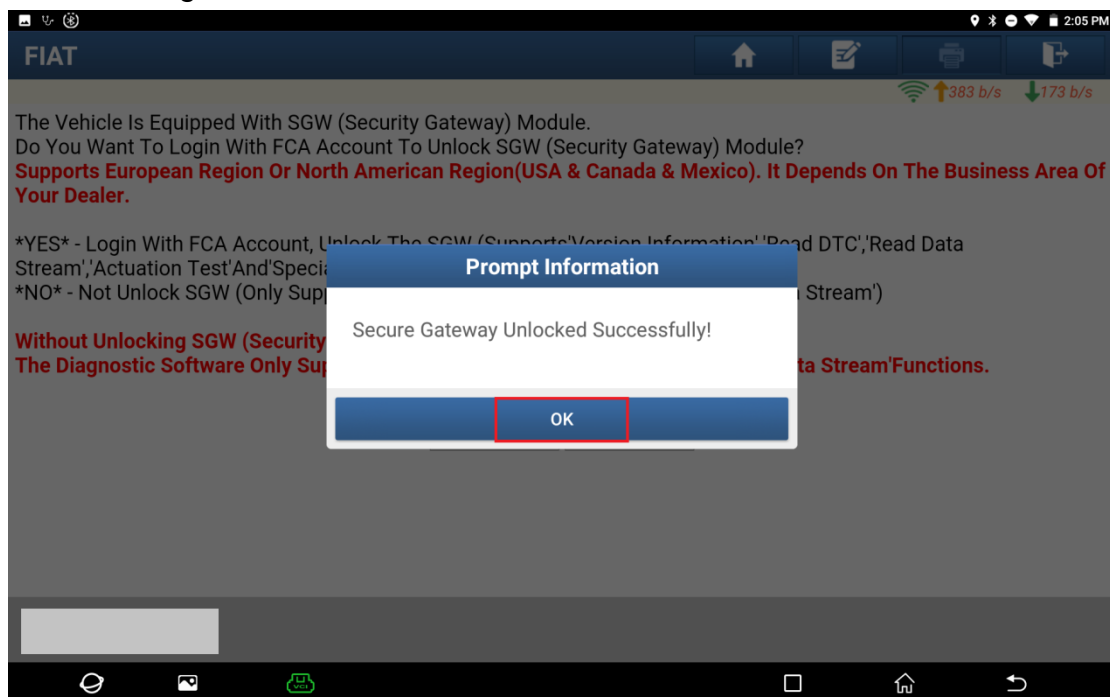
3. Choose [Yes] to unlock the SGW.

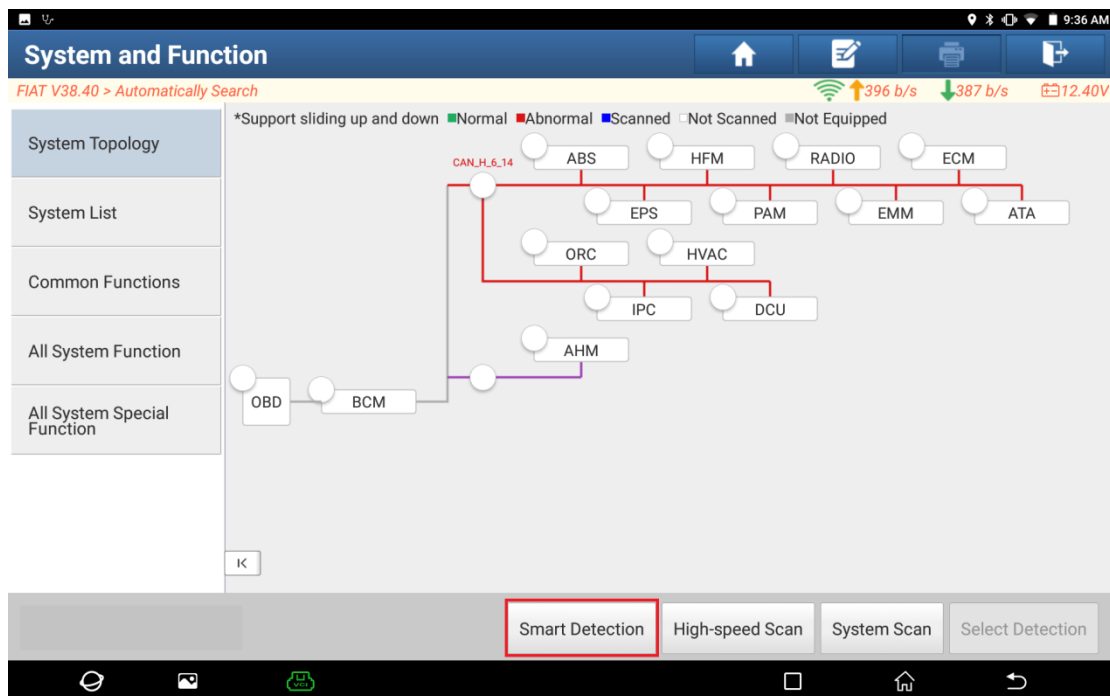
4. Choose [North America] for the region.

5. Input the login user name and password, and click OK.

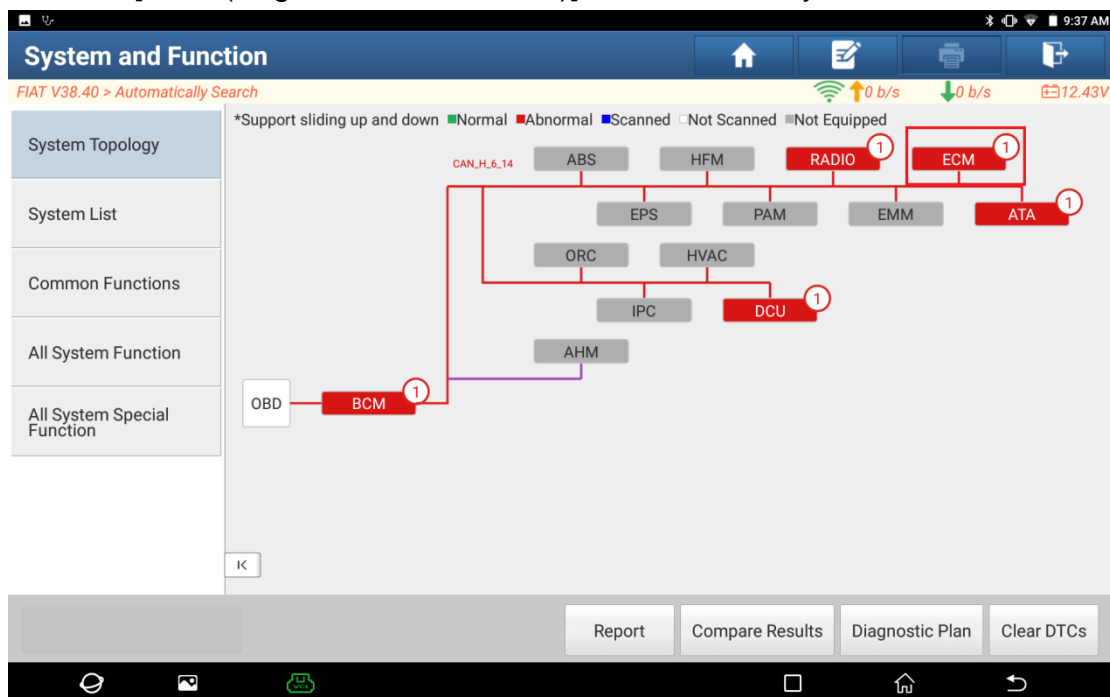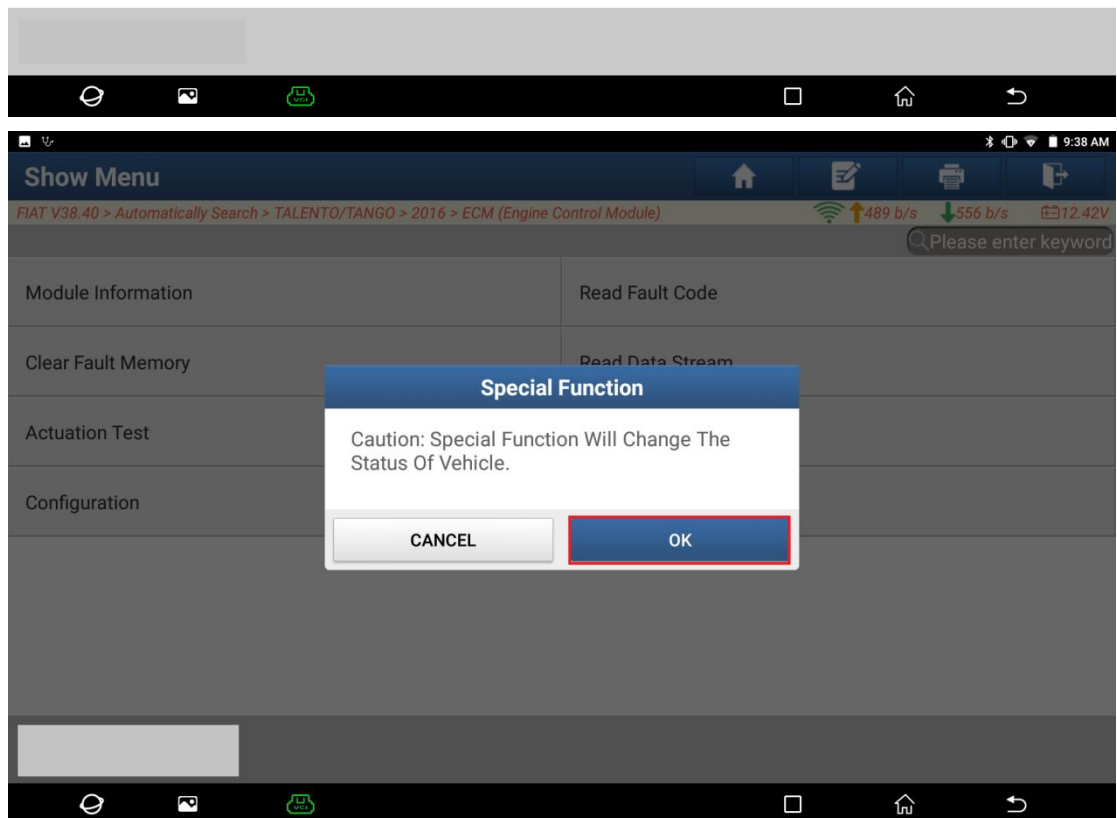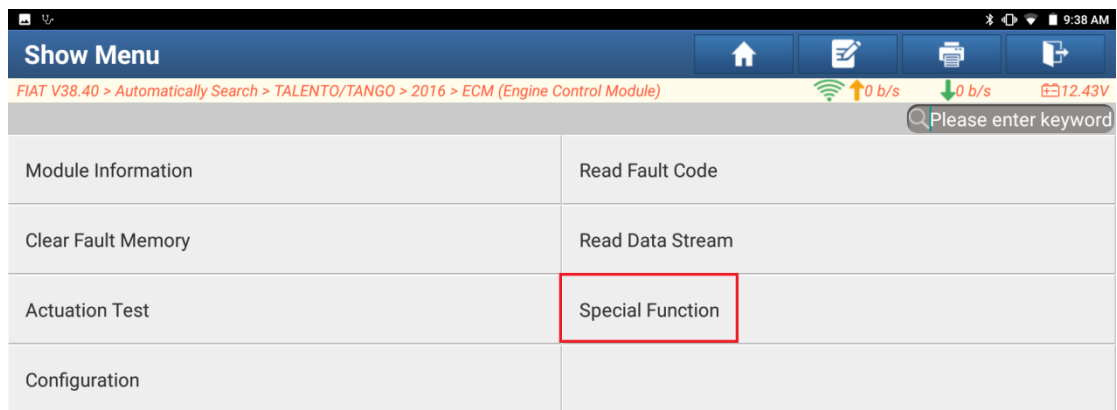6. Unlocking is successful. Click OK.

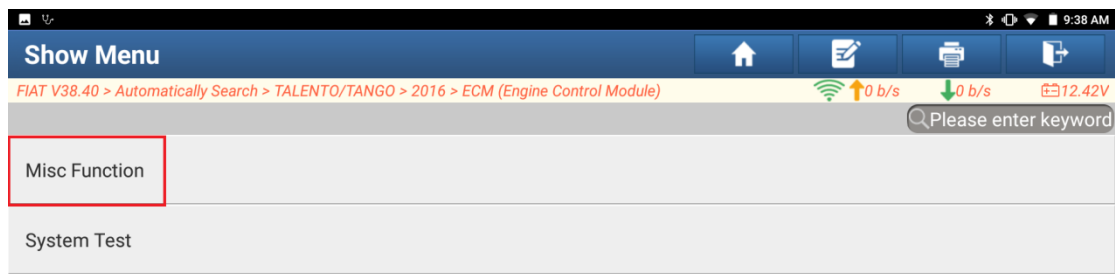7. Click [Smart Detection] to scan the entire vehicle systems.

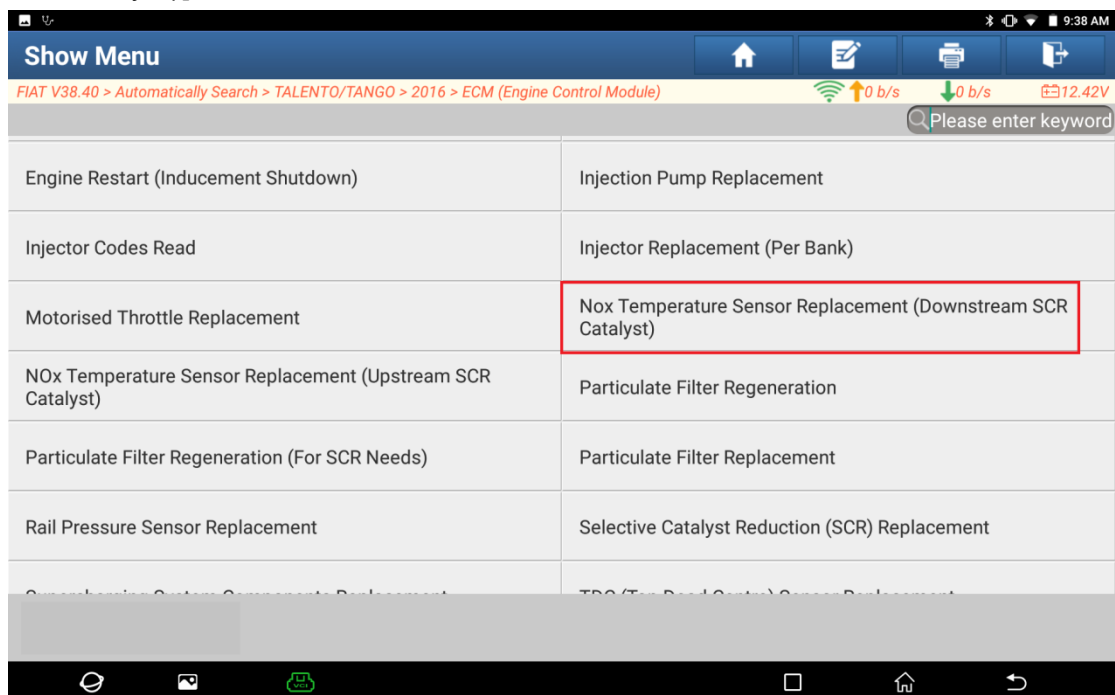8. Click [ECM (Engine Control Module)] to access the system.

9. Click [Special Function] and click OK.

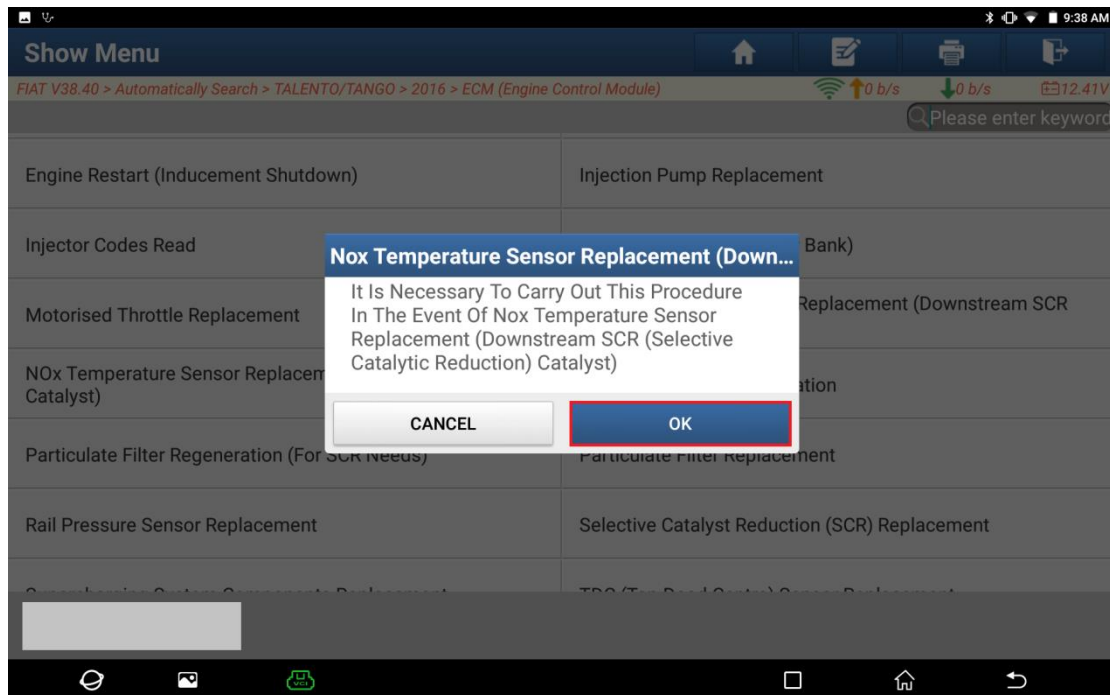10. Choose [Misc Function].

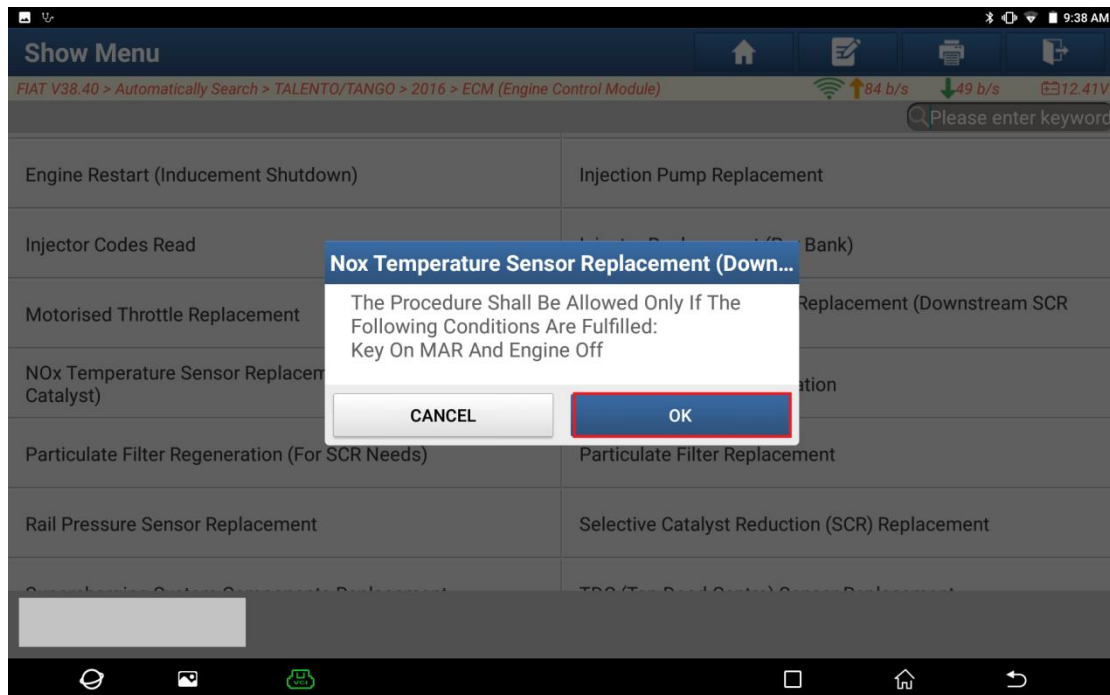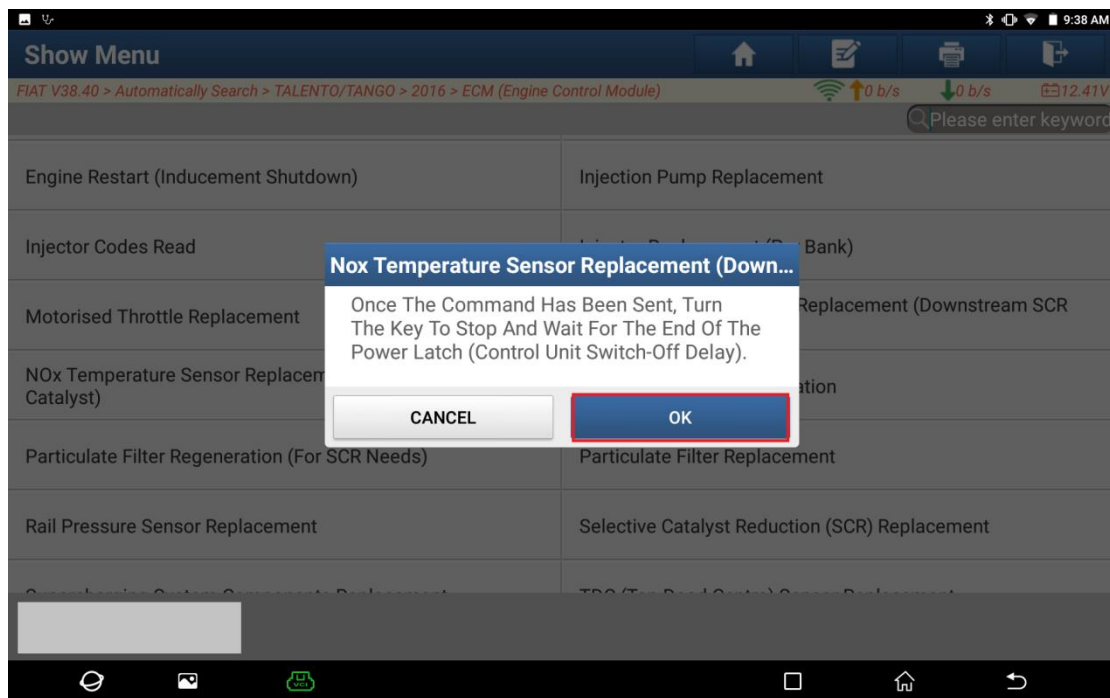11. Choose [Nox Temperature Sensor Replacement (Downstream SCR Catalyst)].
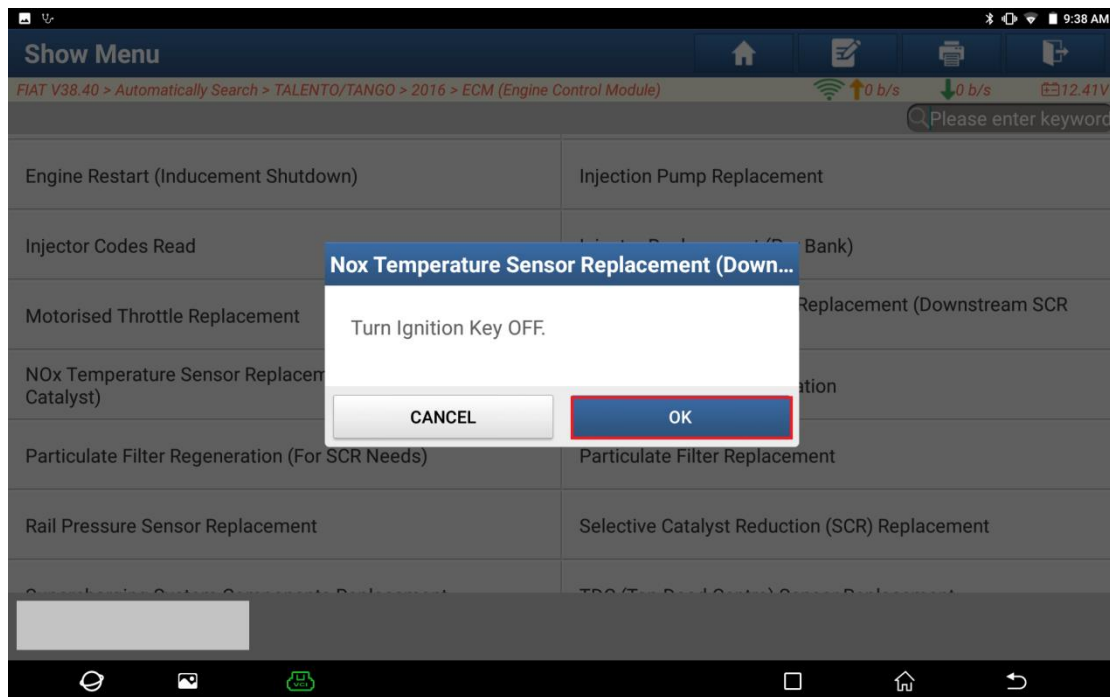
12. Click OK.

13. Click OK.

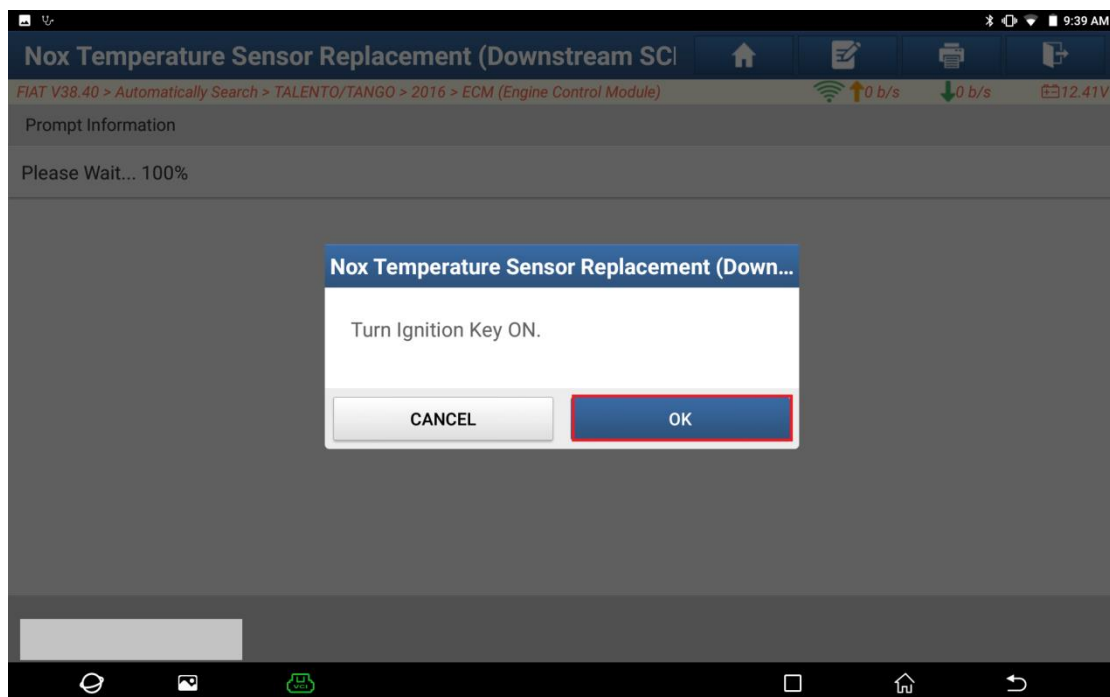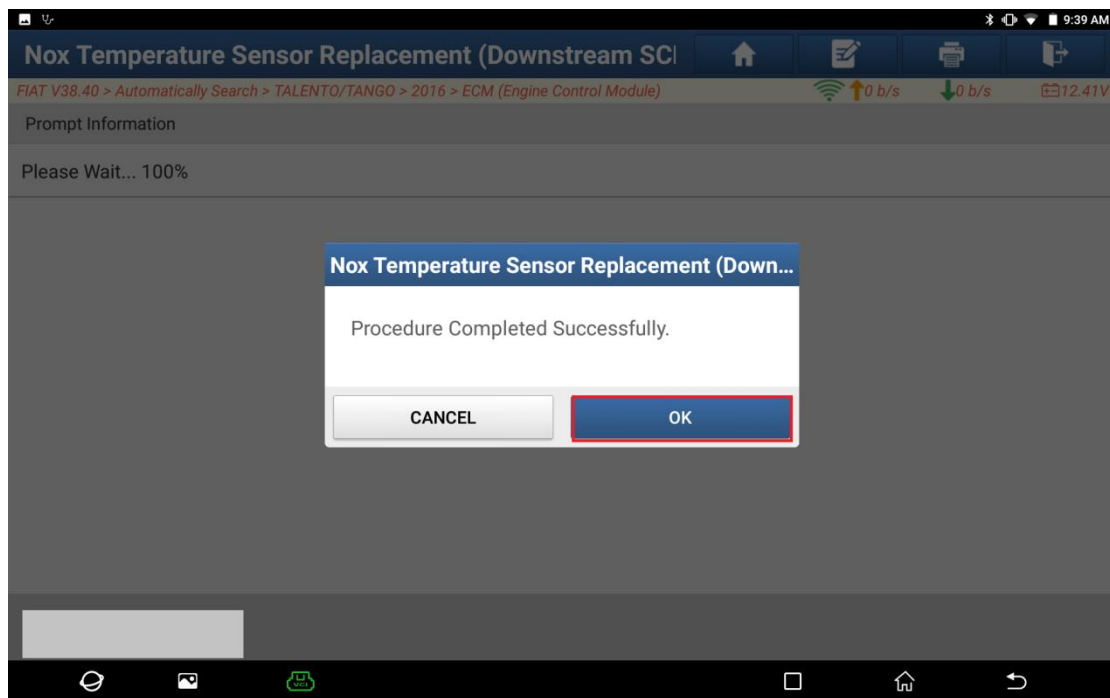## 14. Click OK.

15. Click OK.

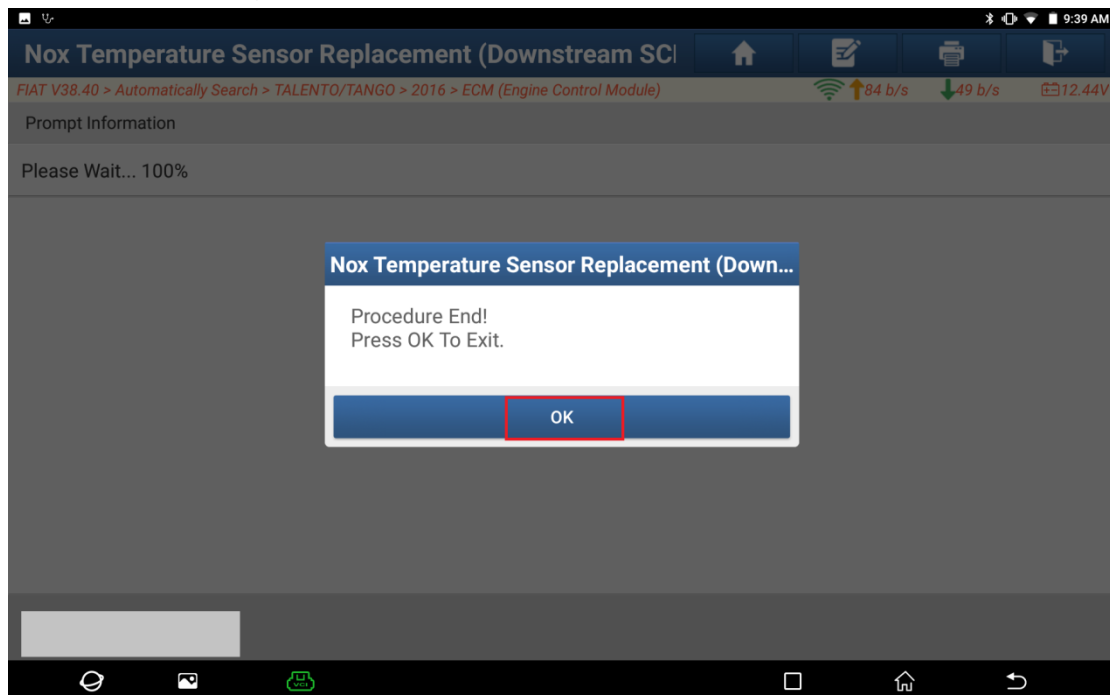16. Wait for the countdown to end.

17. Click OK.

18. Click OK.

19. Click OK. Program execution is completed.

Statement:

The content of this document is copyrighted by Shenzhen Launch Tech Co., Ltd., and no individual or organization may quote or reprint it without consent.