


Chang'an CS75 PLUS Steering Angle Sensor Calibration

Function description: Steering angle sensor calibration


Supported product: Launch PRO or PAD series comprehensive diagnostic equipment

Tested model: Chang'an CS75PLUS VIN: LS4ASE2E0ND10**** (see the following figure)

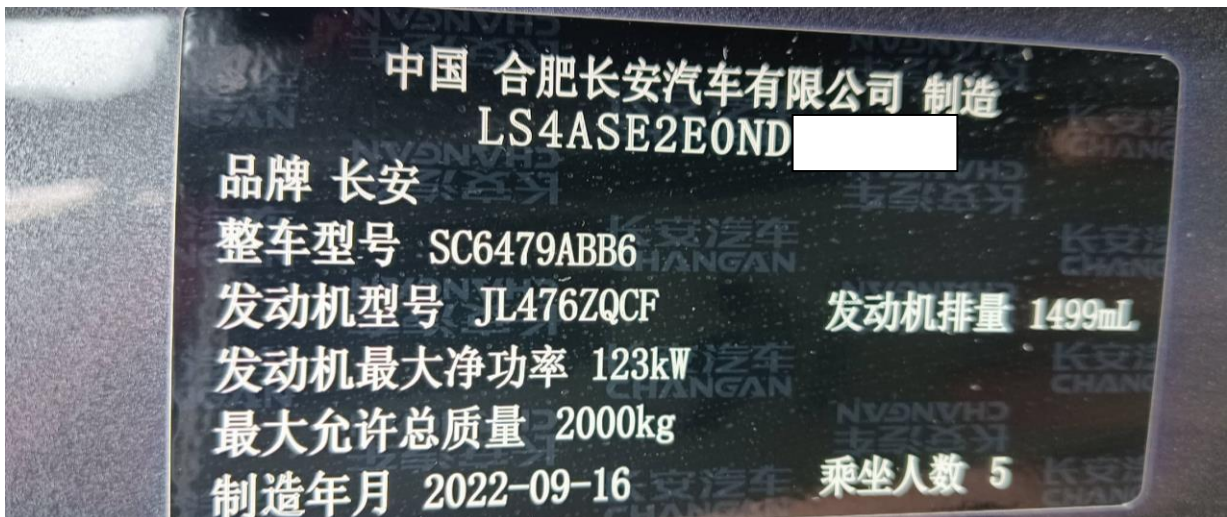


Procedure:

1. Choose [SAS (Steering Angle Sensor)]. (See the following figure.)

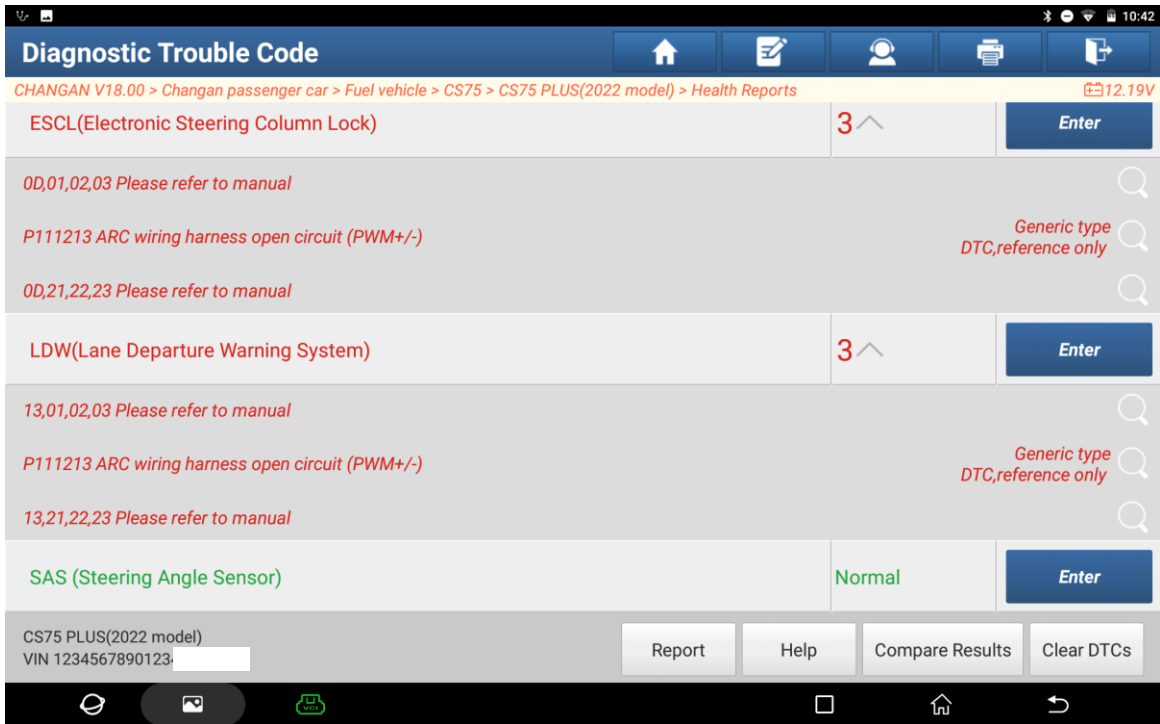


2. Choose [Special functions]. (See the following figure.)

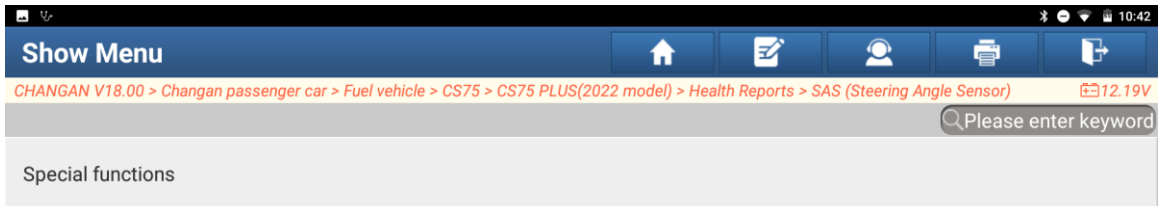


3. Choose [SAS Calibrated]. (See the following figure.)




4. Power off the vehicle for 50s, and turn on again. (See the following figure.)

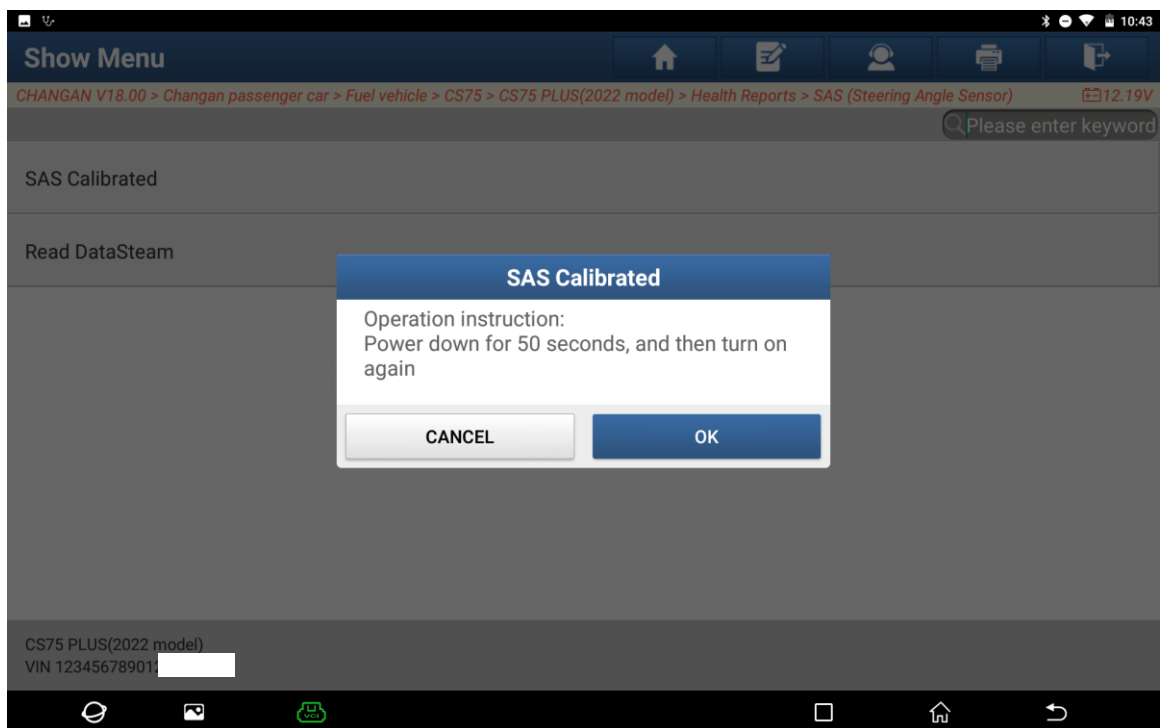


5. Power on the vehicle. Click OK. (See the following figure.)

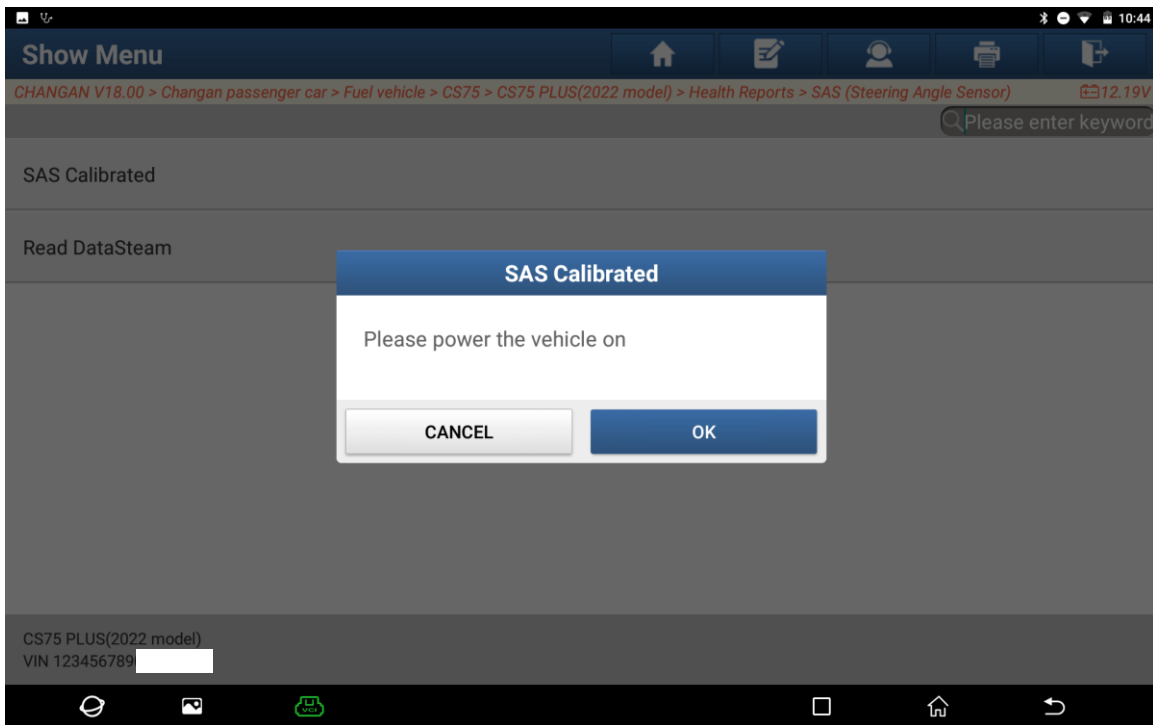


6. Enable the gateway mirror function (open the engine hood), and click OK. (See the following figure.)

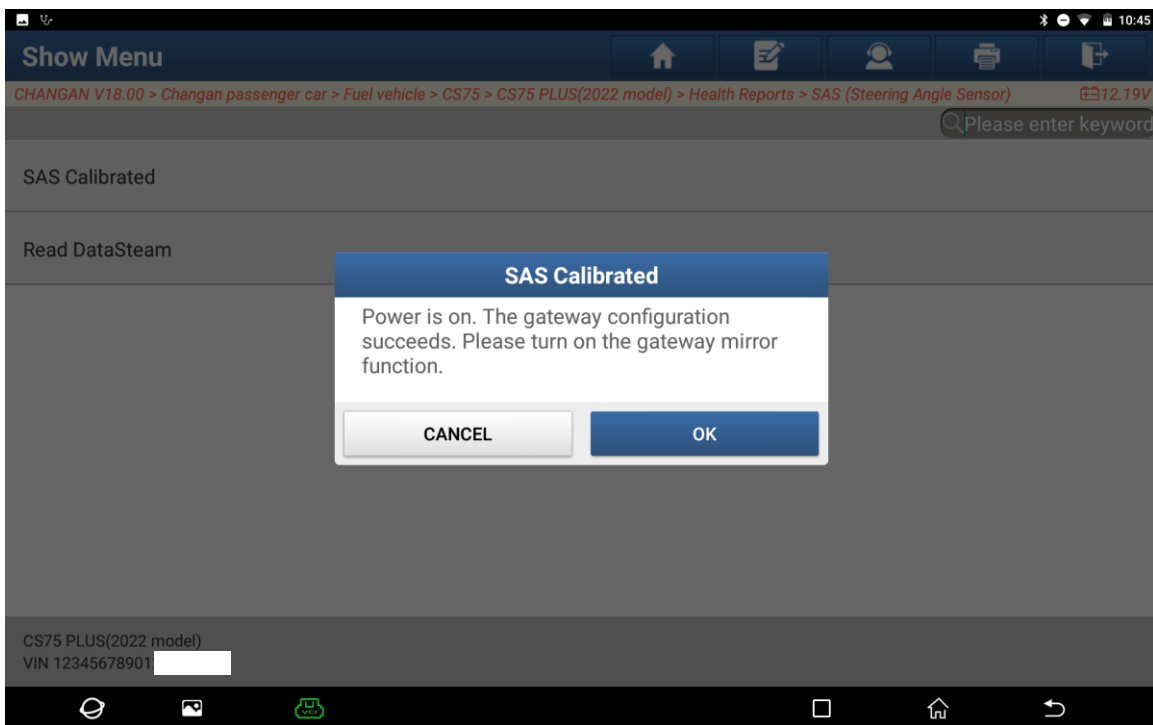


7. Clear calibration. (See the following figure.)

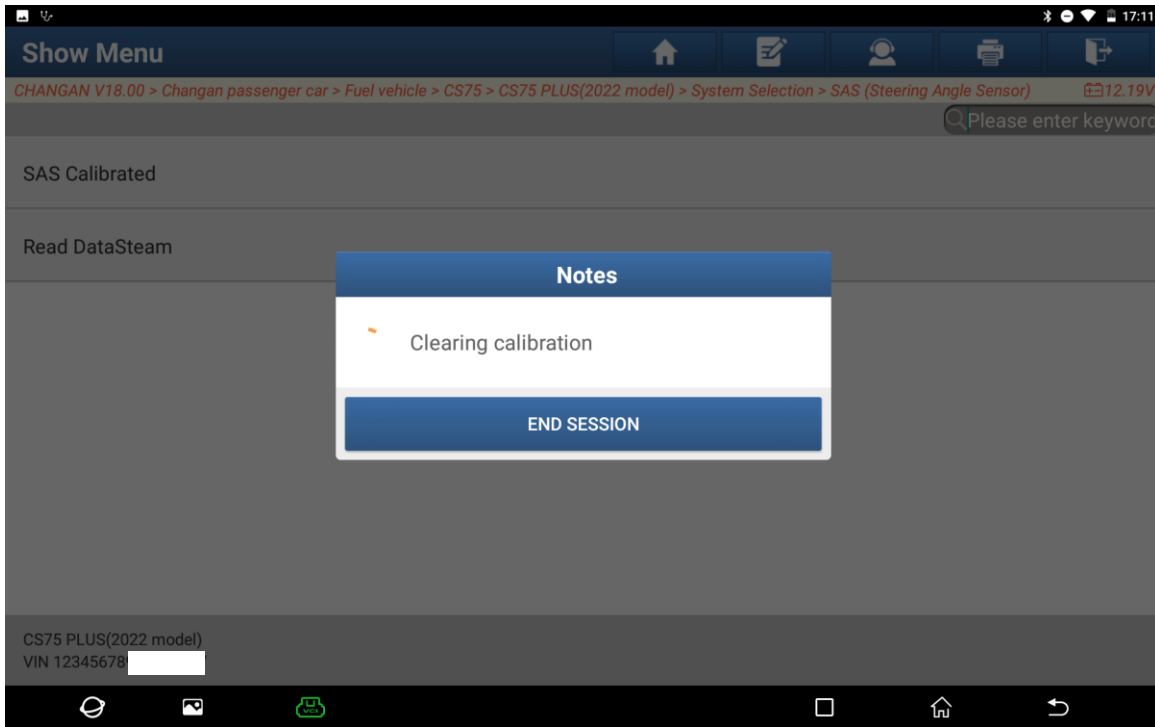


8. Click Calibrated. (See the following figure.)

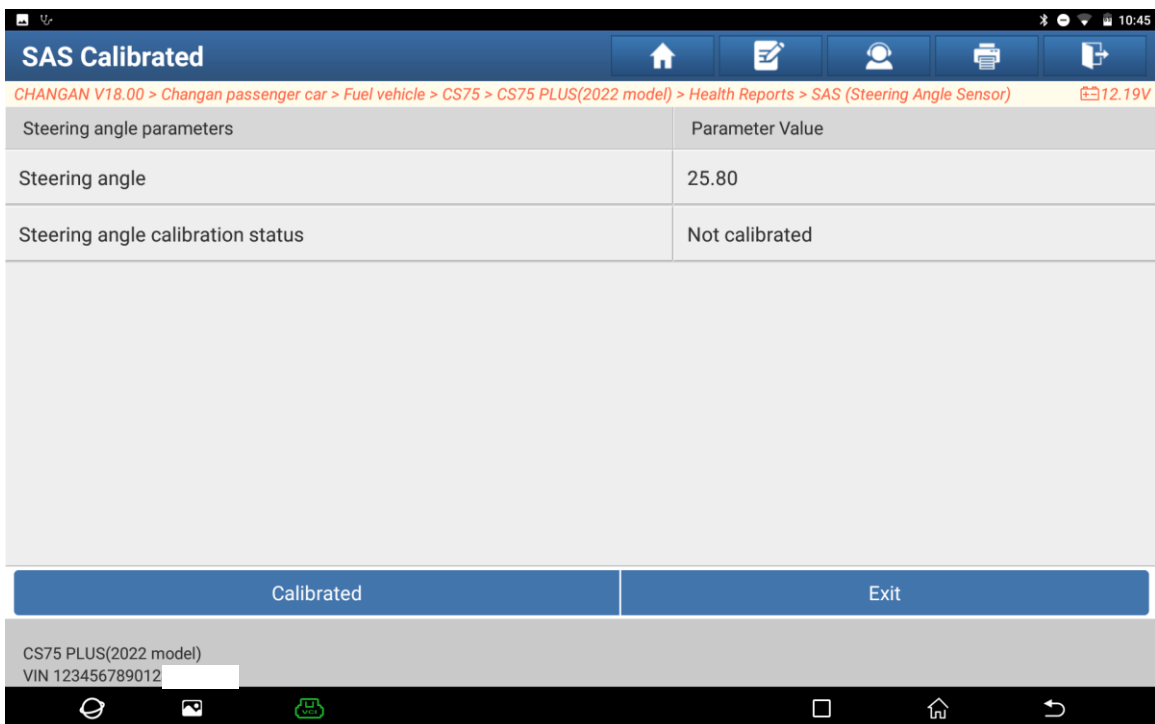


9. Calibrating...(See the following figure.)

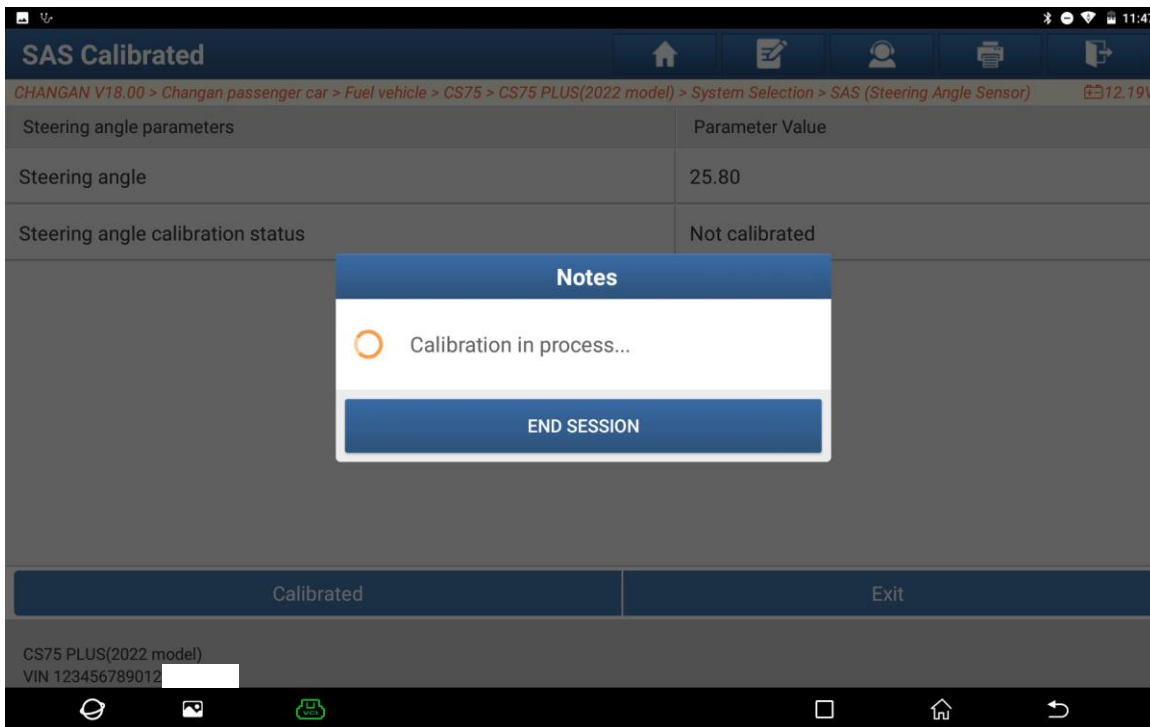

10. Disable the gateway mirror function. (See the following figure.)

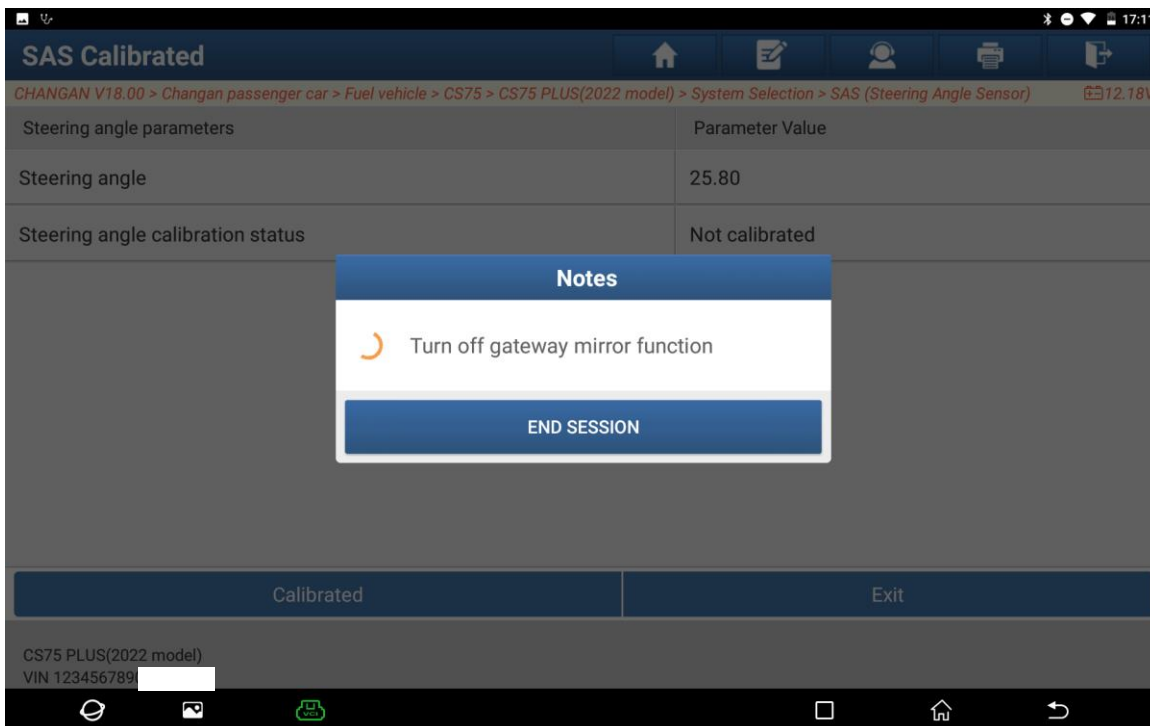

11. SAS calibration is completed. (See the following figure.)

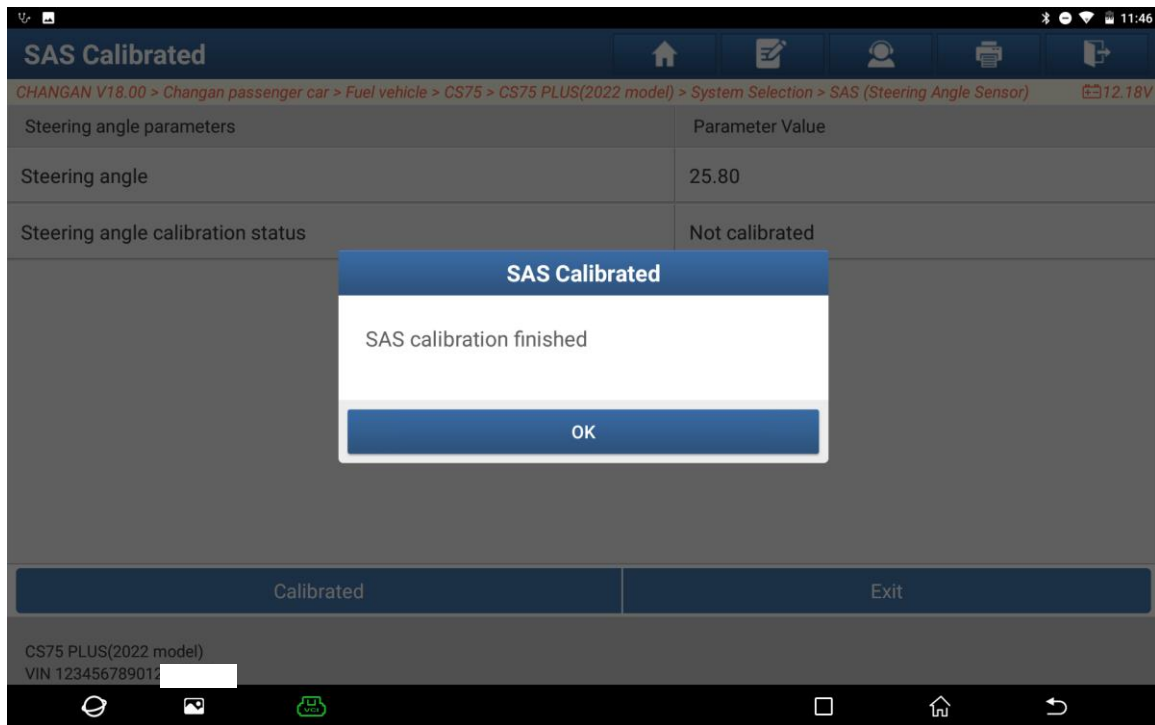

Statement:

The content of this document is copyrighted by Shenzhen Launch Tech Co., Ltd., and no individual or organization may quote or reprint it without consent.