




## Testing all displays and lamps in instrument

This function is intended to Test all displays and lamps in instrument.




Now we take S40(04-) 2008 30786352 AD (ECU Diagnostic Part Number) as an example to illustrate the operation:

Note: The highlight item in the figure indicates corresponding action.




1. step 1: S40(04-)

SELECT MENU			
850			
960			
C70 Coupe			
C70 Conv			
S40 (-04)			
<b>S40 (04-)</b>			
S60			
S70			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:25

2. step 2: select year

SELECT MENU			
VIN			
2004			
2005			
2006			
2007			
<b>2008</b>			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:26




3. step 3: select DIM

SELECT MENU			
DIM(Driver information module)			
PDM(Passenger door module)			
PSM(Power seat module)			
DDM(Driver door module)			
CCM(Climate control module)			
PHM(Phone module)			
SWM(Steering wheel module)			
AUD(Audio Module)			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:27

4. step 4:


Select: Special Function.

If you can't find the Special Function menu, it means the function has not been developed on your vehicle. Please record the VIN (Vehicle Identification Number) and Version Information (can be read by X431 with the function: Reading off control module ID) and email to Launch (x431@cnlaunch.com). We may work out a solution on how to solve the problem.

Select function			
Reading off control module ID			
Reading off Diagnostic Trouble Codes			
Erasing Diagnostic Trouble Codes			
Parameter display			
Activating components/functions			
Service Reset			
Special Function			
PAGE UP		PAGE DOWN	
HOME	BACK	PRINT	HELP
Start			 10:28

5. step 5:

Select: Testing all displays and lamps in instrument

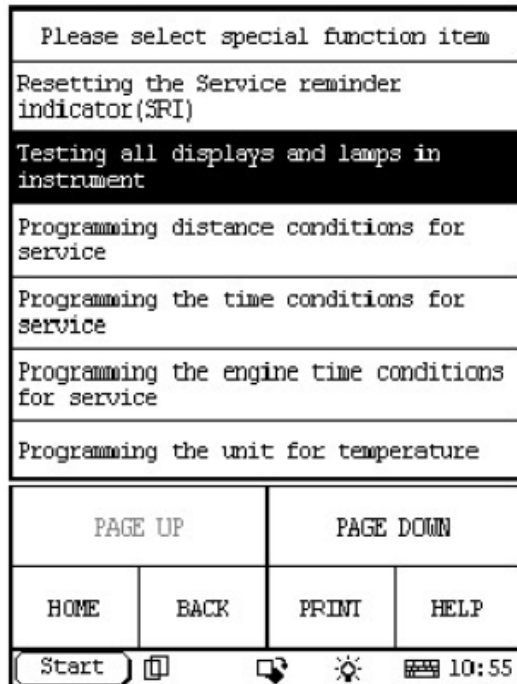


## 6. step 6:

The information of Testing all displays and lamps in instrument:





Ignition on

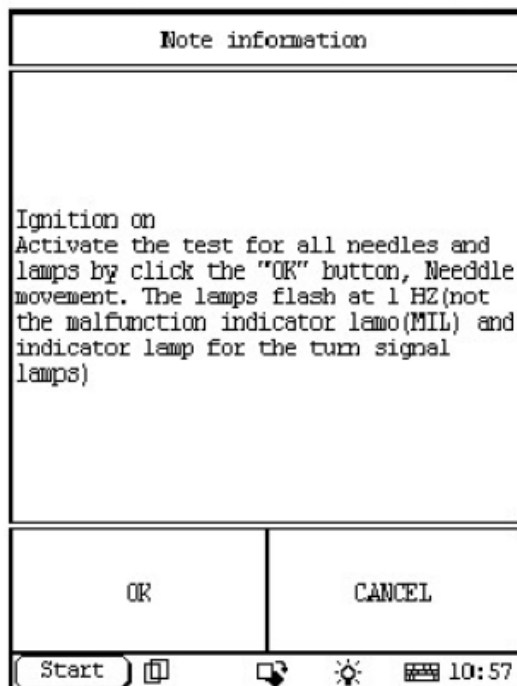Activate the test for all needles and lamps by click the "OK" button, Needle movement. The lamps flash at 1 HZ(not the malfunction indicator lamp(MIL) and indicator lamp for the turn signal lamps)



## 7. step 7:

The test maybe last for about 1 minute, if successes it will display: Test Finished. Otherwise it displays: Test Failed. In the case, please try again.

Note information	
Test Finished.	
OK	PRINT
Start	    11:02

LAUNCH