

Audi Air_Suspension_Matching_Operation_Method A6L_2006

Fault description:

Alarm of the air suspension fault light.



Steps:

1. Use the device to select Audi to read the fault code, as shown in Figure1

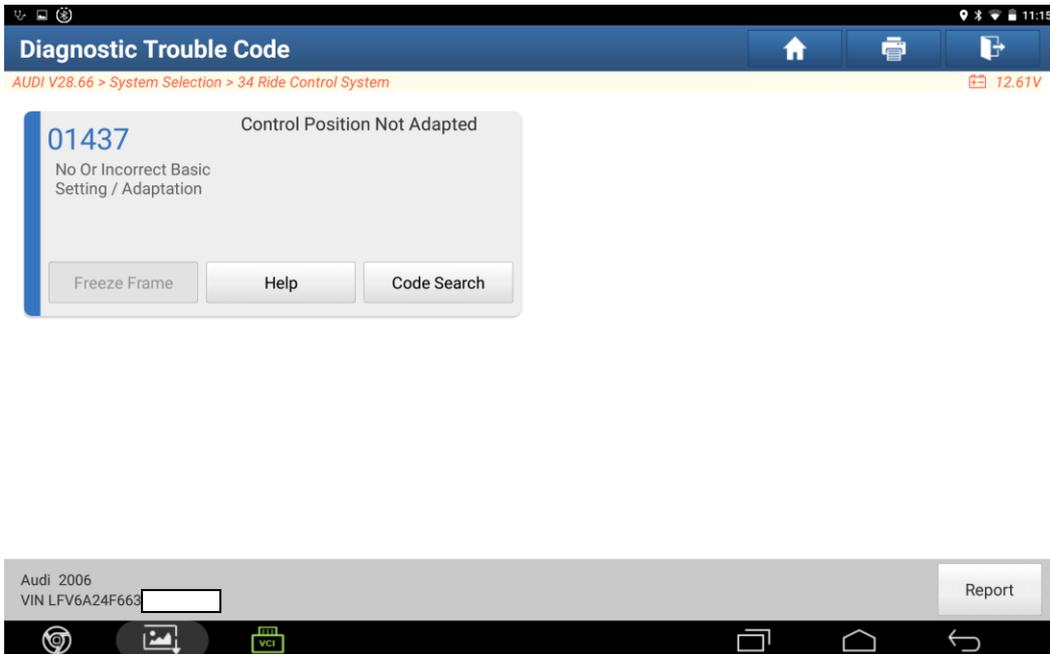


Figure 1

2. Go back to select the "special function" item and click to match the air suspension, as shown in Figure 2.

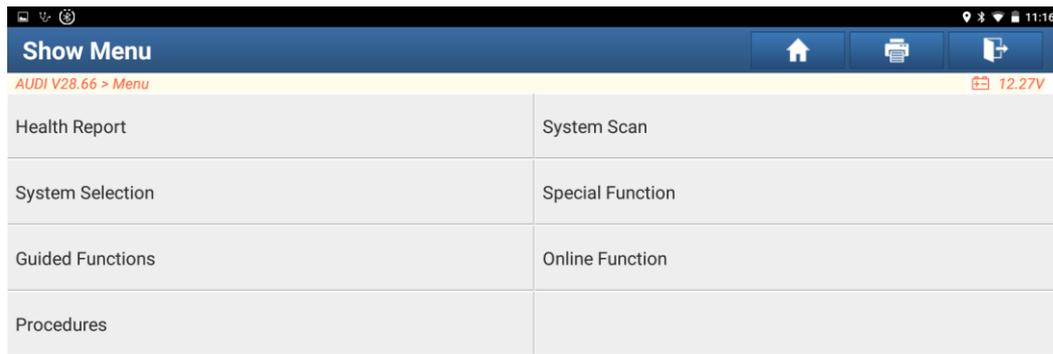


Figure 2

- Notes on reading the prompt message: The vehicle must be parked on a flat ground, turn on the ignition switch, start the engine or connect the charger, the door must be kept closed during matching, and ensure that no heavy objects are stored in the vehicle, as shown in Figure 3.

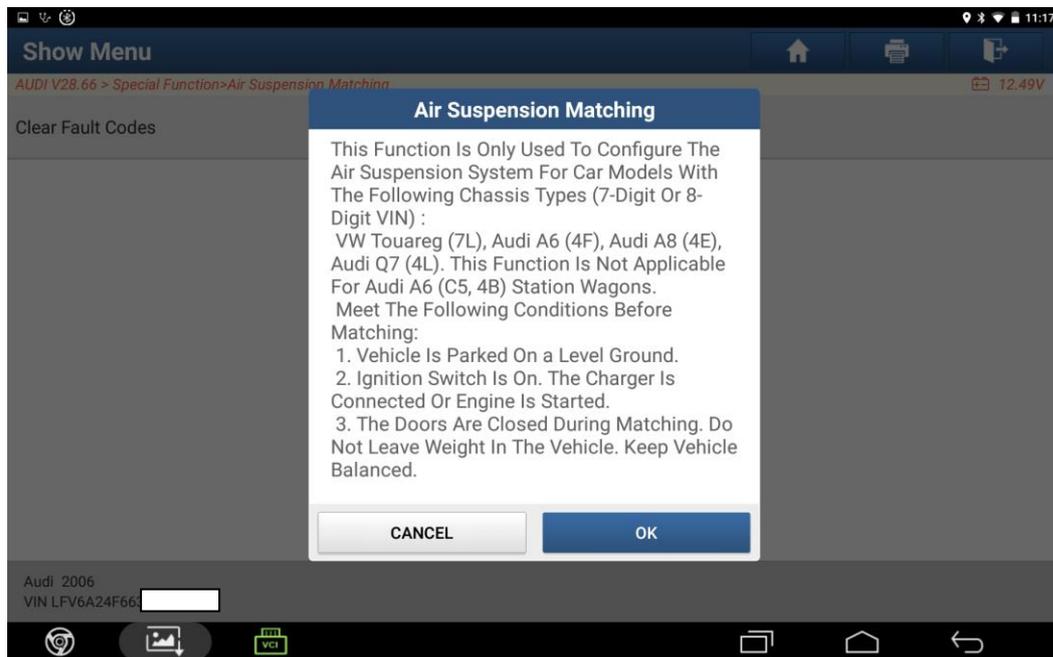


Figure 3

4. Input the actual body height values of front left, front right, rear left, and rear right according to the prompts and click "OK", as shown in Figure 4;

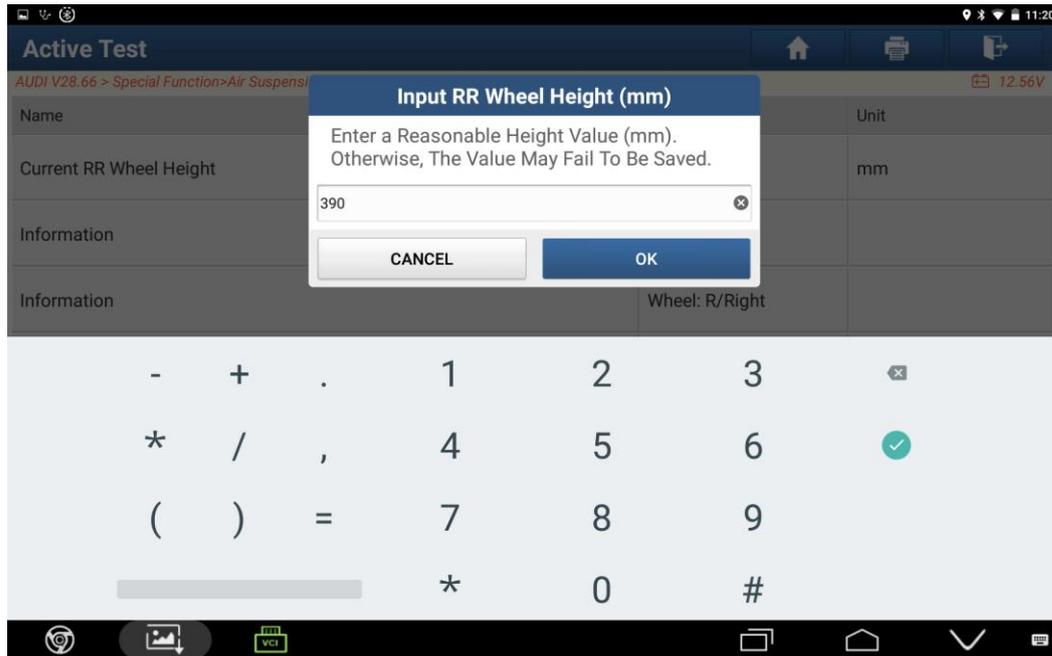


Figure 4

5. Click "005-Save all height values", as shown in Figure 5.

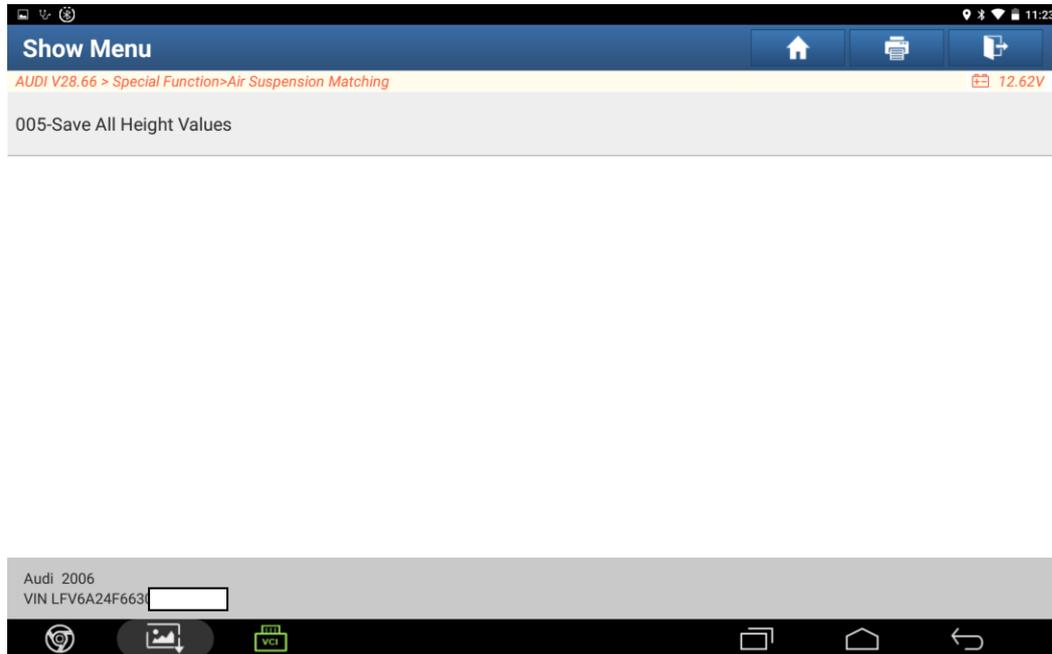


Figure 5

6. Click "Save all height values", as shown in Figure 6;



Figure 6

7. Enter "1" and click OK, as shown in Figure 7.

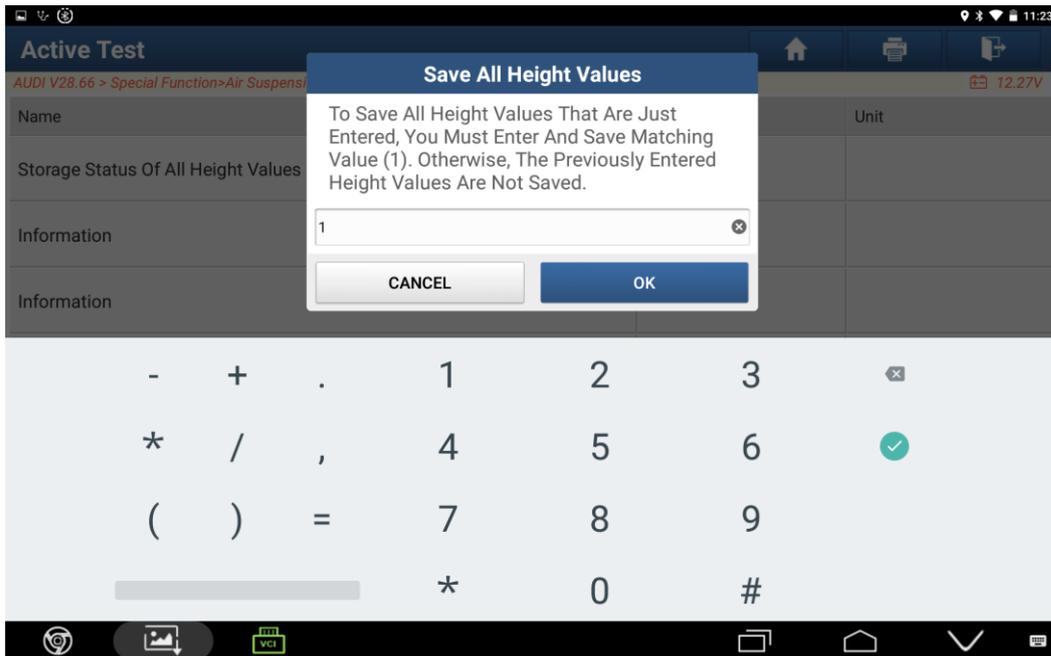


Figure 7

8. Click "OK", as shown in Figure 8

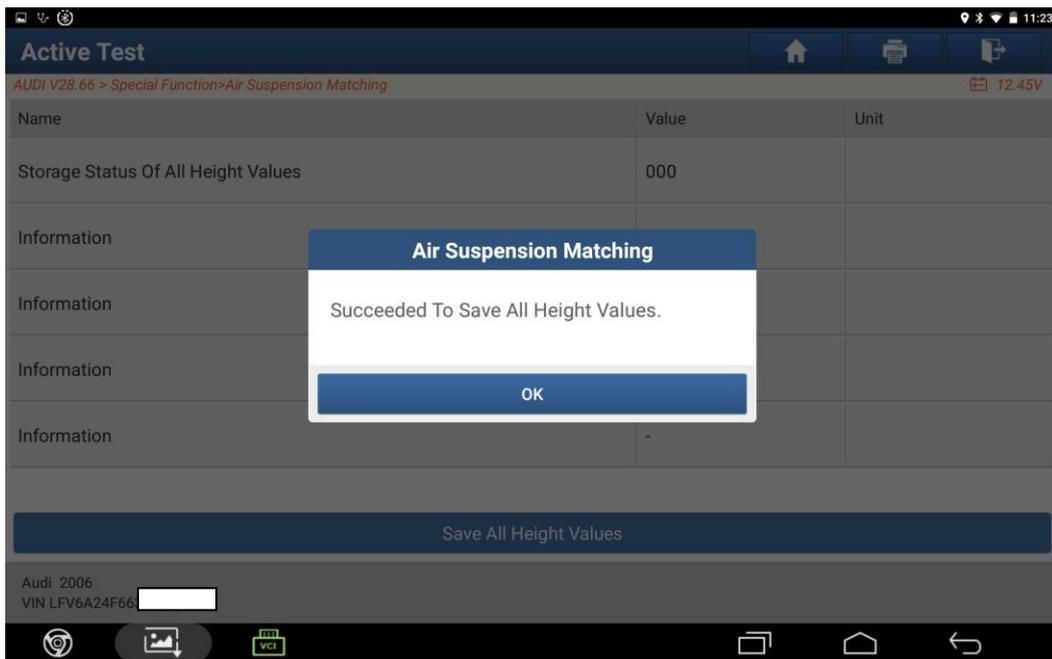


Figure 8

9. The air suspension matching is completed, click "OK", as shown in Figure 9.

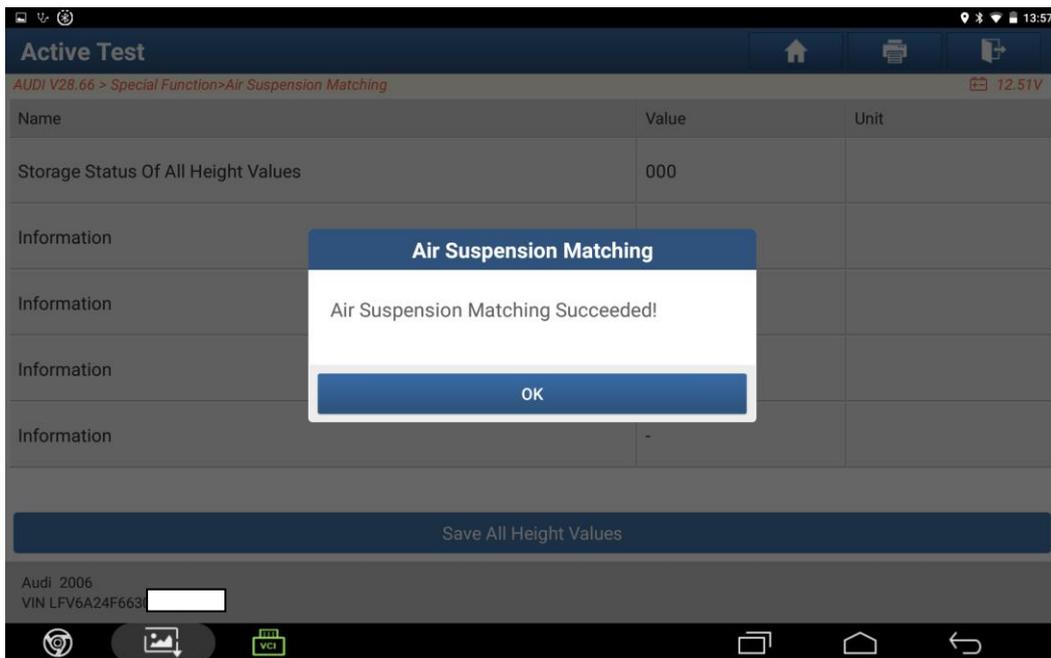


Figure 9

10. When the fault code is read again, no fault code is displayed, as shown in Figure 10

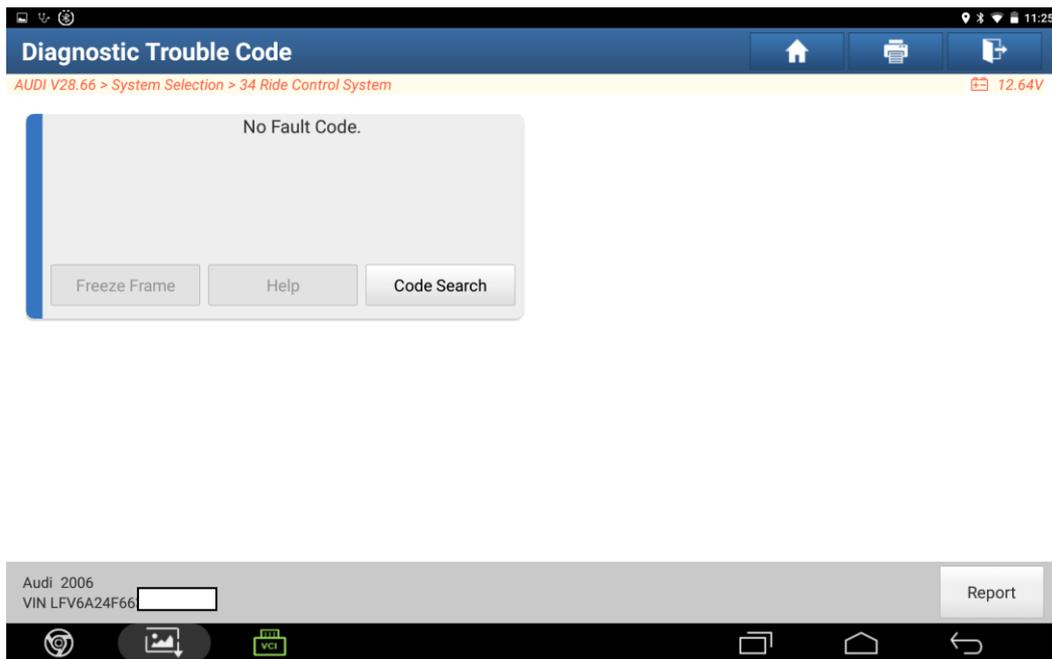


Figure 10

The end.