

2023 Toyota WILDLANDER 8A(BA)-4A

Intelligent Keys Matching

Applicable models:

Area	Model	Year
US	bZ4X	
US	COROLLA	2022-
US	COROLLA CROSS	
US	COROLLA HV	2023
US	CROWN HV	
US	PRIUS	2023-
US	RAV4 Prime	
US	SEQUOIA HV	
US	SIENNA HV	2022-
US	TUNDRA	2021/12-
US	TUNDRA HV	
US	VENZA HV	2022-
US	YARiS	2022-
US	ES350	2022-
US	IS300	2022-
US	IS350	2022-
US	LC500	2022-
US	LS500	2022-
US	LX600	2023-
US	NX250	
US	NX350	
US	NX350h	
US	NX450H+	
US	RC300	2022-
US	RC350	2022-
US	RX350h	
US	RX450h+	
US	RX500h	
US	RZ450e	

Function Description: Toyota WILDLANDER 8A(BA)-4A Intelligent
Keys Matching

Support Products: X-431 IMMO Pro

Tested vehicle model: WILDLANDER 2023, VIN code: LVGC91AZ8PG***



Operation process:

1. Taking the X-431 IMMO Pro as an example, enter the Toyota series and select "Immobilizer/Keys Programming" to enter as shown in Figure 1:

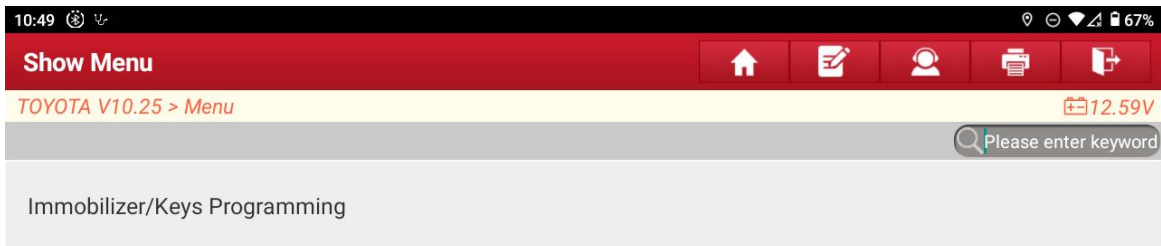


Figure 1

2. Select [Vehicle Mode] to enter as shown in Figure

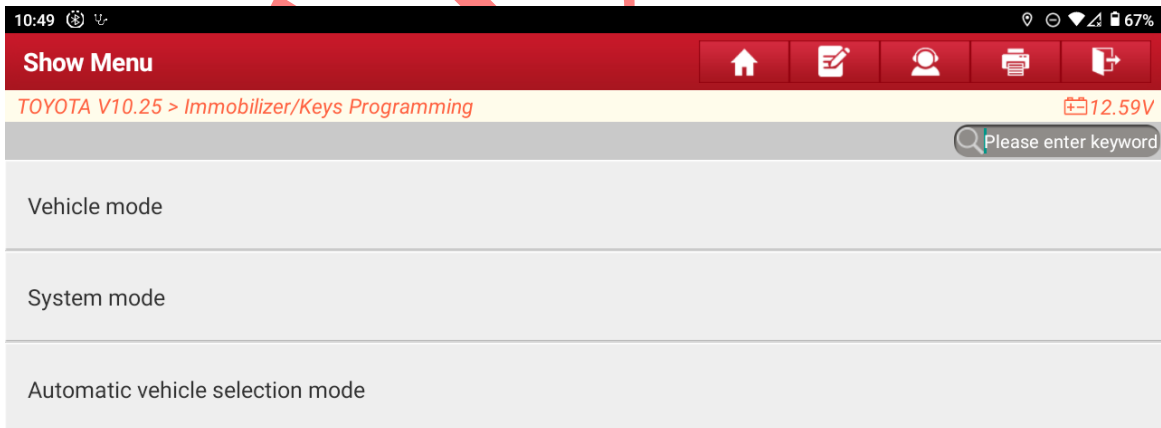


Figure 2

3. Select 'Other region' to enter, as shown in Figure 3:

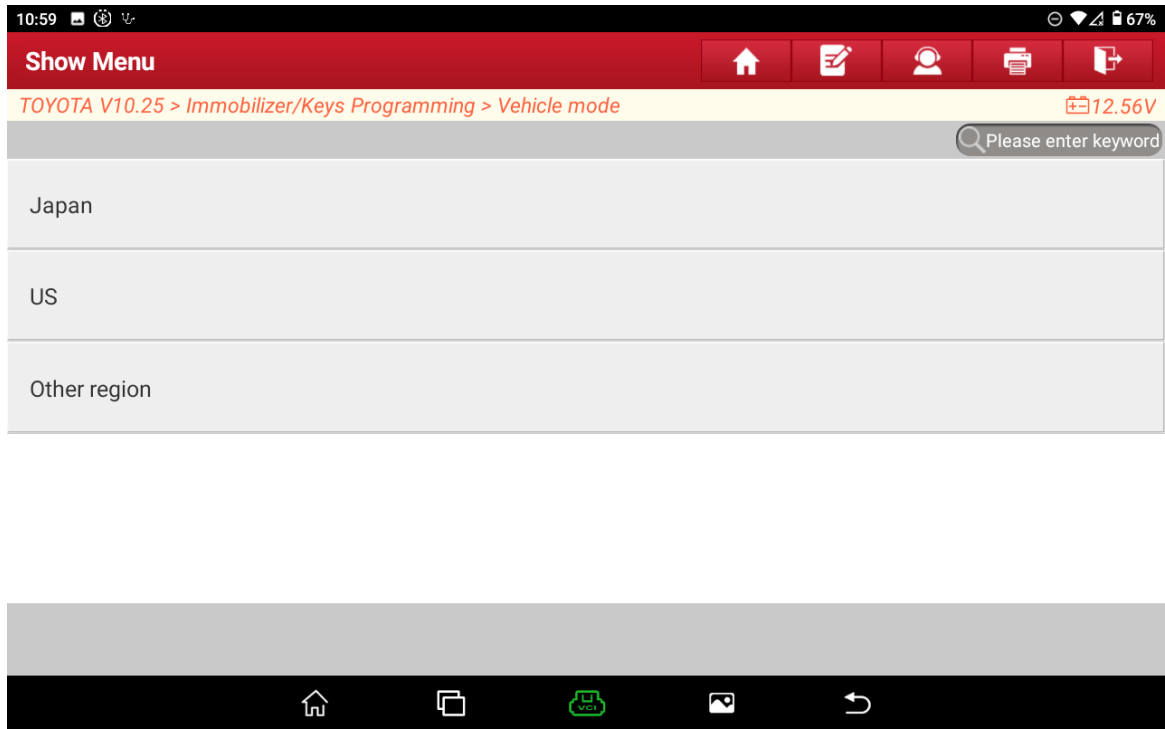


Figure 3

4. Select WILDLANDER PHV as show figure in 4:



Figure 4

5. Select '2022-' as show figure in 5:

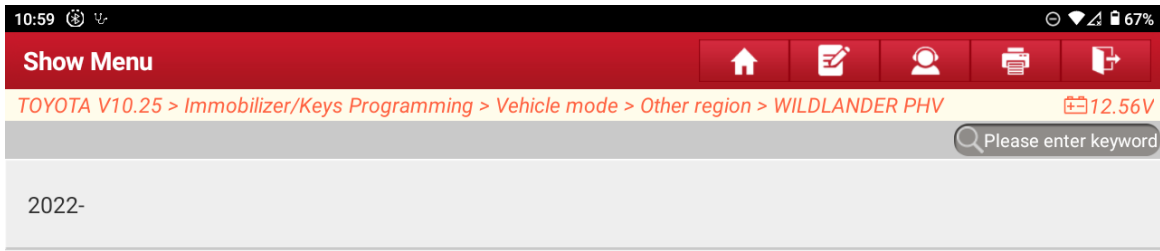


Figure 5

6. Select 'Smart key' as show figure in 6:

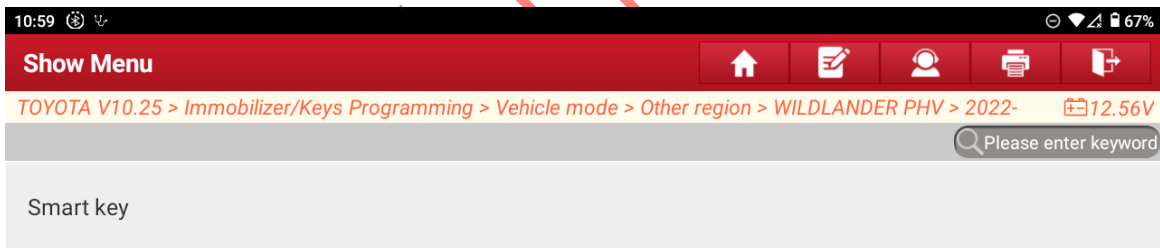


Figure 6

7. Select 'Type 11' as show figure in 7:

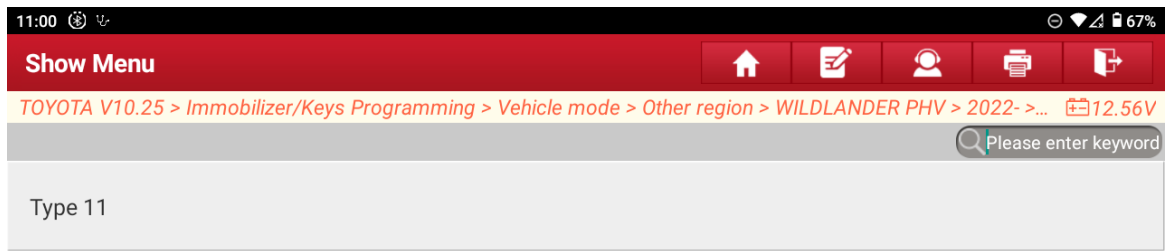


Figure 7

8. Select 'Read immobilizer data' as show figure in 8:

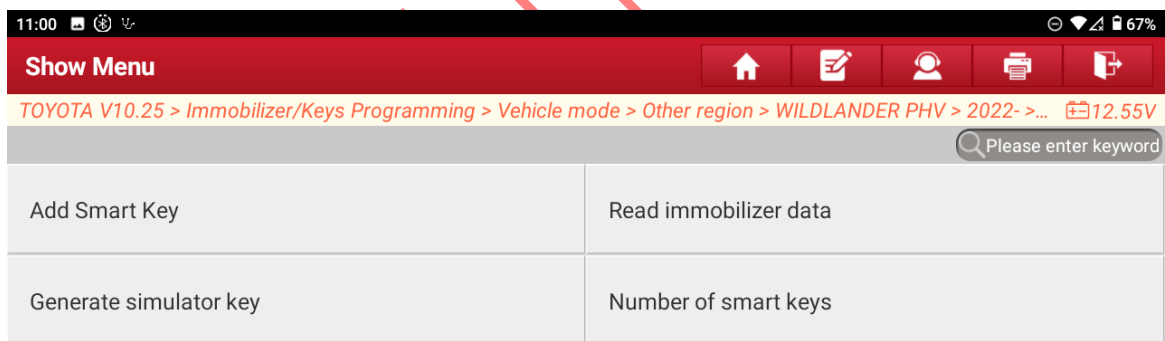


Figure 8

9. Select 'Wiring Diagram' as show figure in 9:

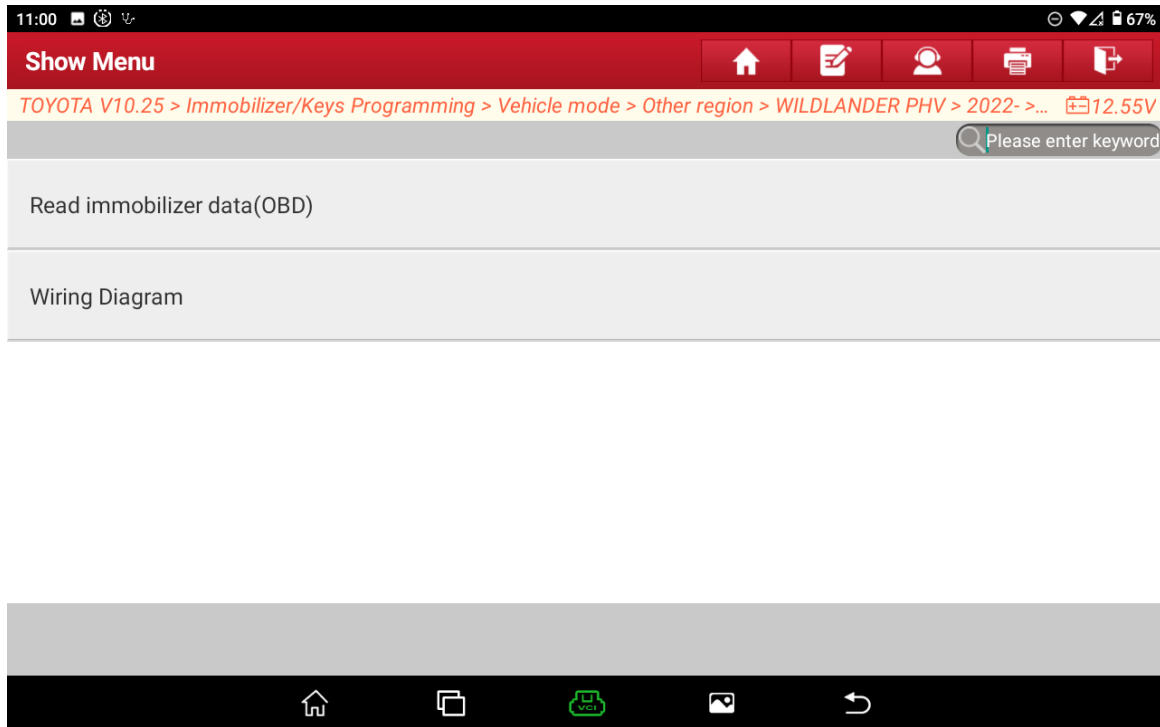


Figure 9

10. Connect the Toyota intelligent full lost wiring harness according to the wiring diagram and select [OK] to exit as shown in Figure 10:

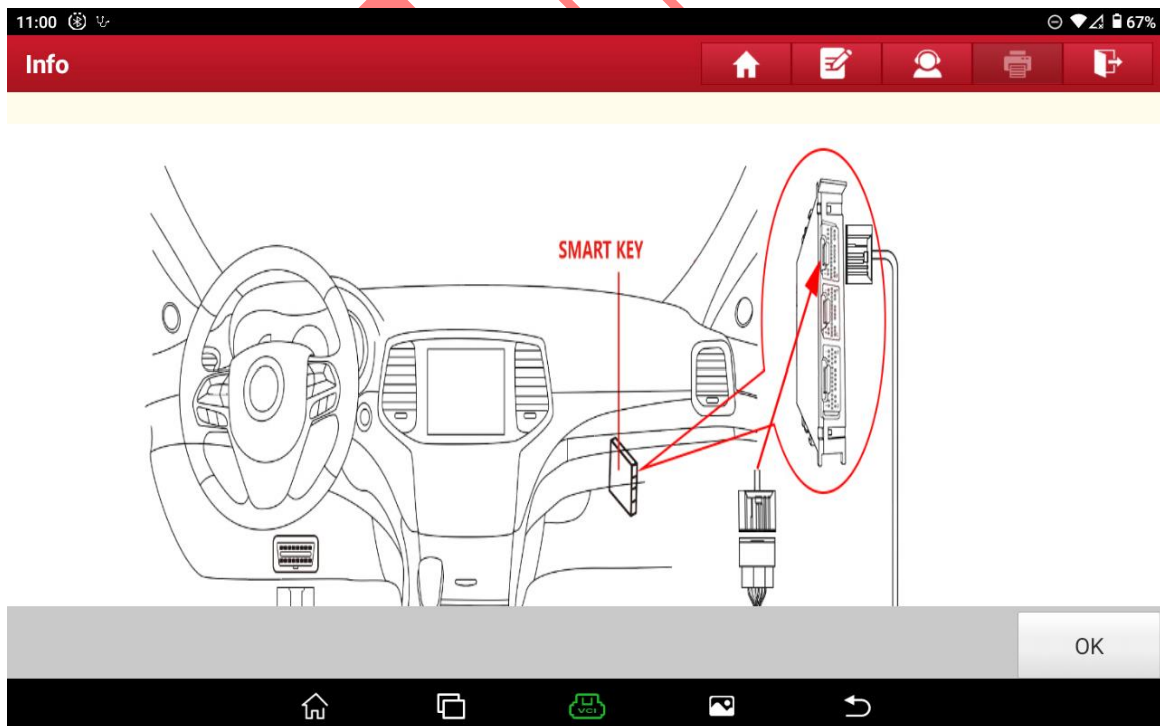


Figure 10



11. Select 'Read immobilizer data(OBD)' as show figure in 11:



Figure 11

12. Network connection normal selection [OK] as shown in Figure 12:

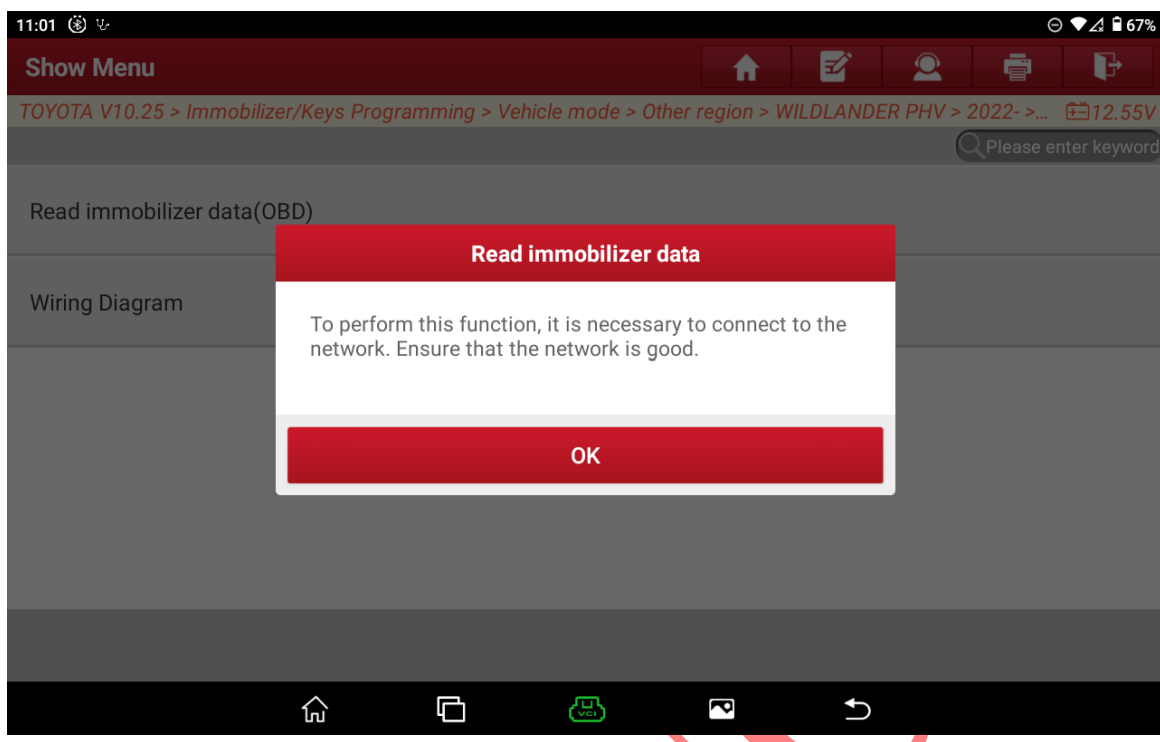


Figure 12

13. Save the generated file name and select [OK] to enter as shown in Figure 13:

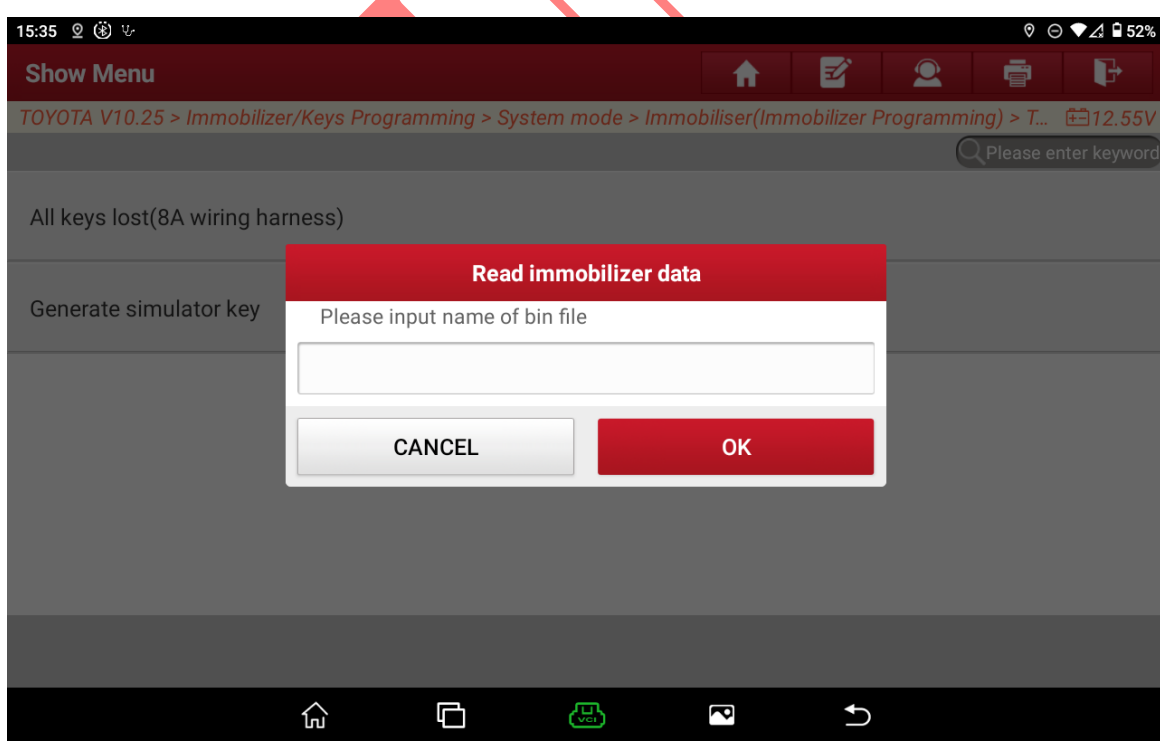


Figure 13

14. Return to the previous interface and select 'Generate Simulation Key' to enter as shown in Figure 14:

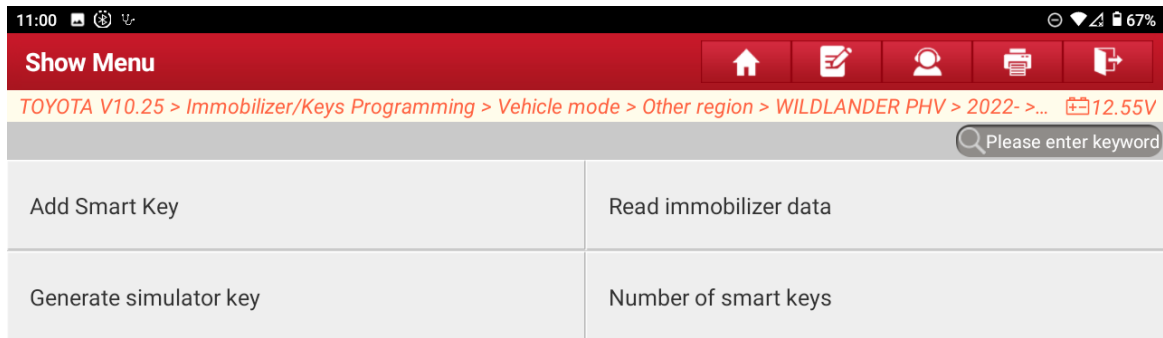


Figure 14

15. Connect the G3 programmer to the Toyota simulation key and select [OK] to enter as shown in Figure 15:

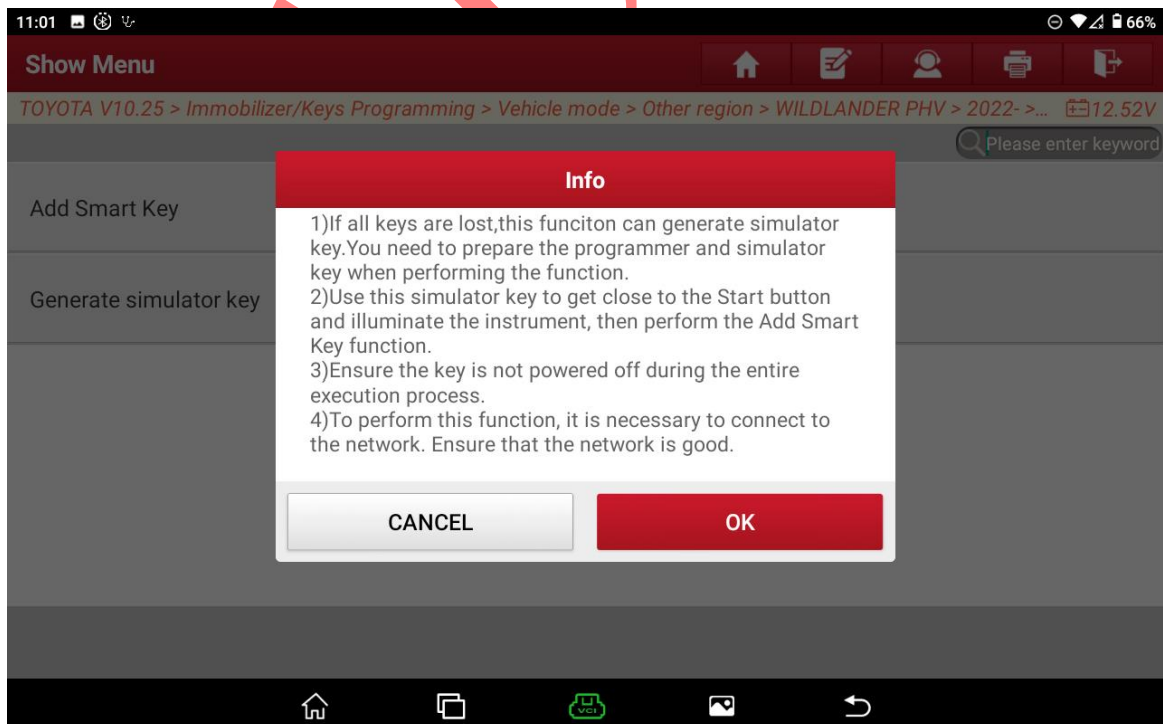


Figure 15

16. Select the just saved file and confirm to generate a simulated key as shown in Figure 16:

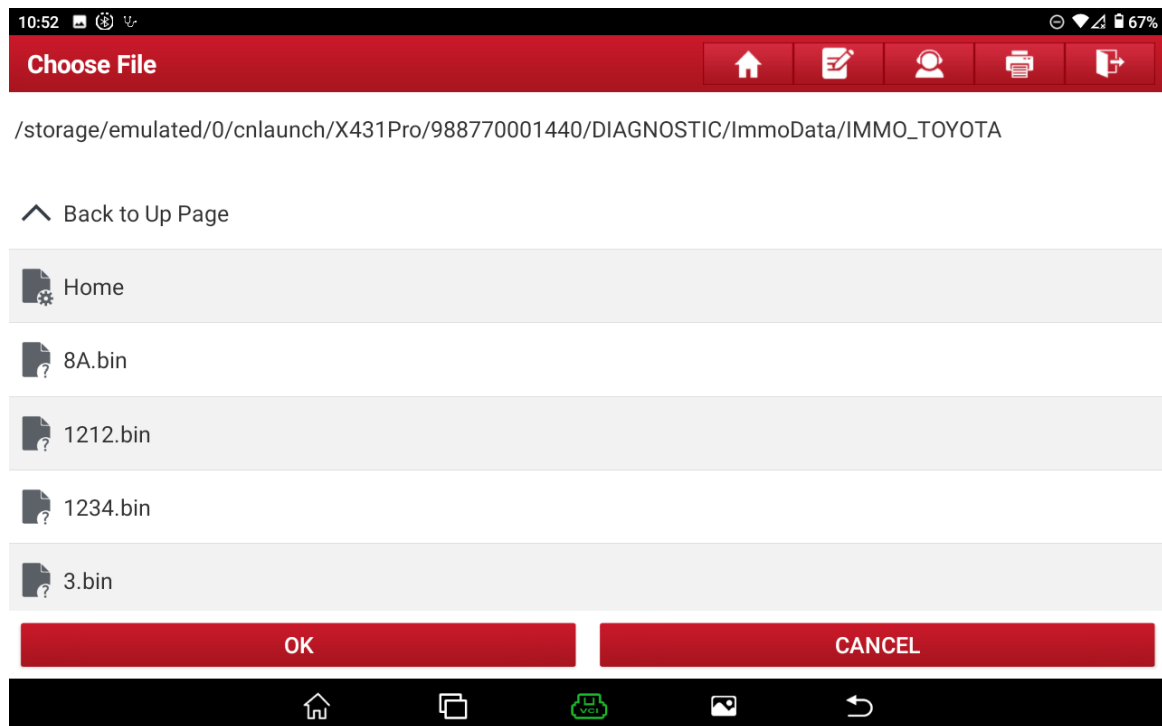


Figure 16

17. Simulated key generation successful, select [OK] to return to matching interface 17:

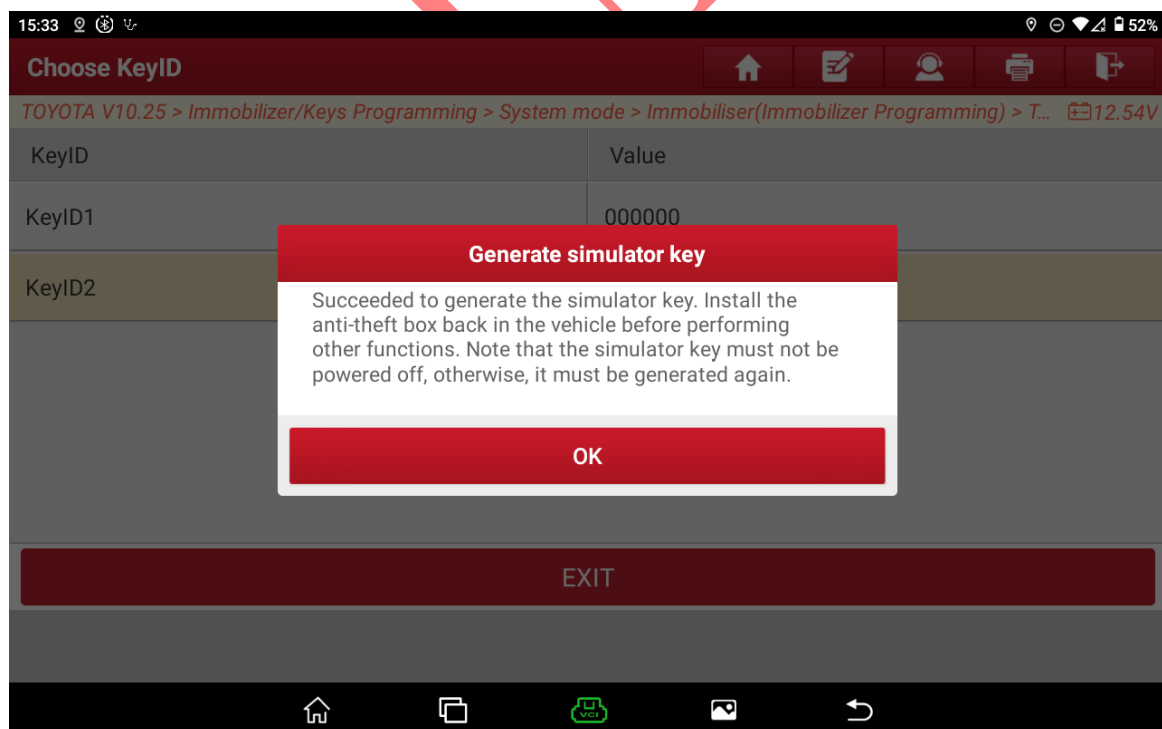


Figure 17

18. Use a simulated key to add the key function and complete the matching 18:

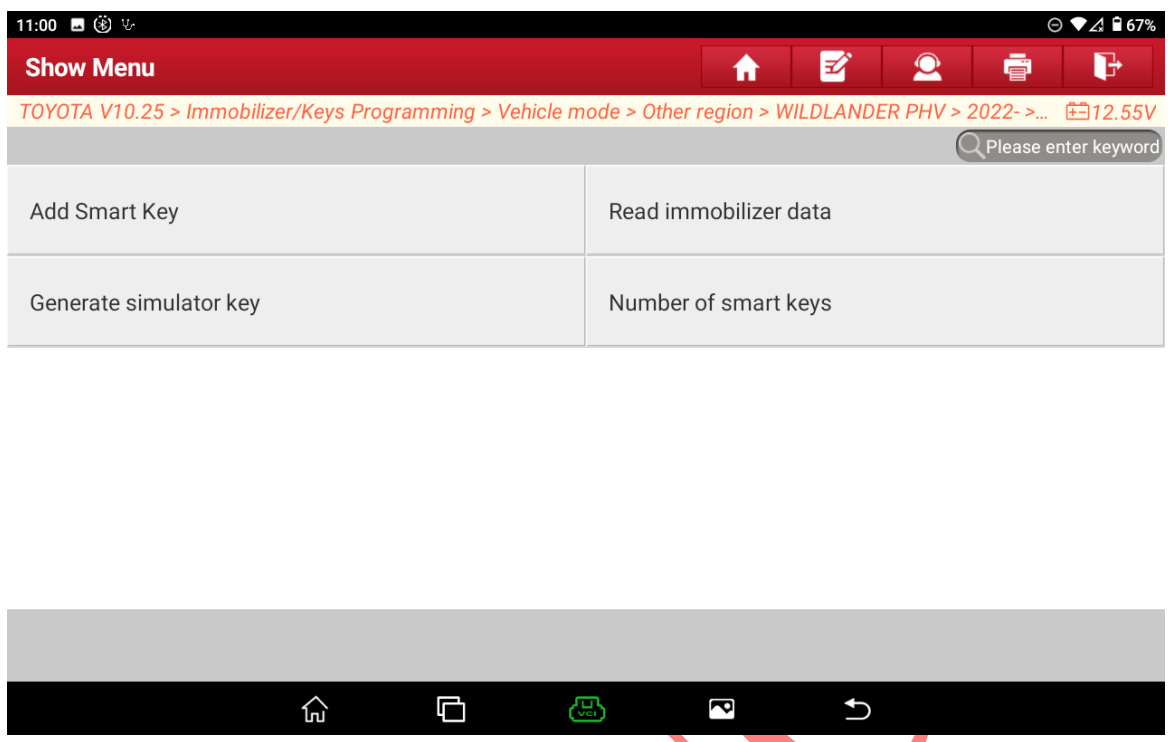


Figure 18

Statement:

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.